Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources				
Supplier's name	e or trade mark:	Magic Pyramid Brü	cher & Partner KG	
Supplier's addre	ess: Info, Europa	allee 34, 50226 Fred	chen, DE	
Model identifie	er: 127-668-24V			
Type of light so	urce:			
Lighting techno	logy used:	LED	Non-directional or directional:	DLS
Light source cap-type		2216 SMD		
(or other electric interface)				
Mains or non-m	nains:	NMLS	Connected light source (CLS):	Nein
Colour-tuneable	e light source:	Nein	Envelope:	-
High luminance	light source:	Nein		
Anti-glare shield:		Nein	Dimmable:	Yes
		Product para	meters	
Parameter		Value	Parameter	Value
		General product p		
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		48	Energy efficiency class	G
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		3 600 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P _{on}), expressed in W		48,0	Standby power (P _{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer	Height	5	Spectral power	See image
dimensions	Width	10	distribution in the	in last page
without	Depth	5 000		

separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity	0,454			
		coordinates (x and y)	0,405			
Parameters for directional light sources:						
Peak luminous intensity (cd)	1 146	Beam angle in	120			
		degrees, or the				
		range of beam				
		angles that can be				
		set				
Parameters for LED and OLED light sources:						
R9 colour rendering index value	67	Survival factor	-			
the lumen maintenance factor	-					

(a)'-': not applicable; (b)'-': not applicable;

Spectrum

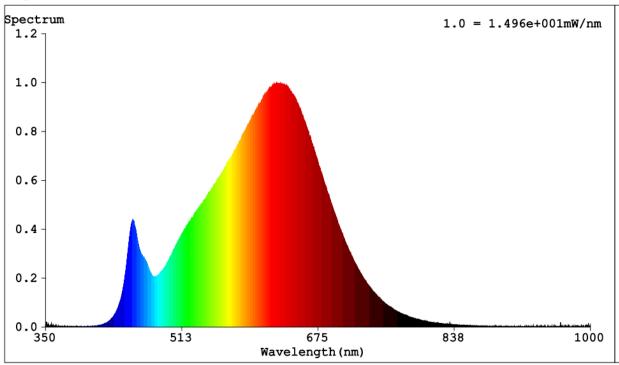

Spectral Distribution