



## Reflector Down Light | Ø225mm | White | 60° | 4000K | 10W


Article number: 136-290

This Reflector Downlight is available in Black (RAL9005) and White (RAL9001). In addition, it has a very good light reflection and a wide lightbeam that is very suitable for lower ceilings.

- Plug & Play by means of 120cm connection cable and Euro plug
- High quality external driver with optimal heat dissipation
- Long lifespan of 50.000 hours

### Specifications

|                   |                       |               |                       |                    |               |
|-------------------|-----------------------|---------------|-----------------------|--------------------|---------------|
| Type              | Round                 | CRI value     | >80                   | Mounting depth     | 87 mm         |
| Input voltage     | 220-240V              | Driver        | Incl. external driver | Cable length       | 120 cm        |
| Power             | 10 Watt               |               | (not dimmable)        | Connection type    | Europlug      |
| Luminous flux     | 1206 Lm               | Power factor  | >0.90                 | Housing material   | Aluminium     |
| Color temperature | 4000K                 | Beam angle    | 60°                   | Housing color      | White RAL9016 |
| Light color       | Natural white         | Adjustable    | Ja                    | material cover     | Glass         |
| Dimming method    | Optional              | IP rate       | IP20                  | Color cover        | Clear         |
| LED type          | Citizen COB           | Mounting      | Recessed              | Certification mark | CE, RoHS      |
| Lifetime          | L70B50 (50.000 hours) | Diameter      | Ø 225 mm              | Warranty           | 5 years       |
|                   |                       | Mounting hole | Ø 200 mm              |                    |               |

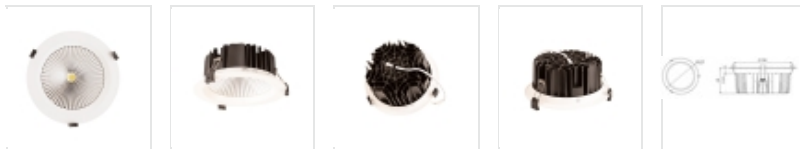

### Line Drawings

