


2021-9-10 | Data subject to change without notice

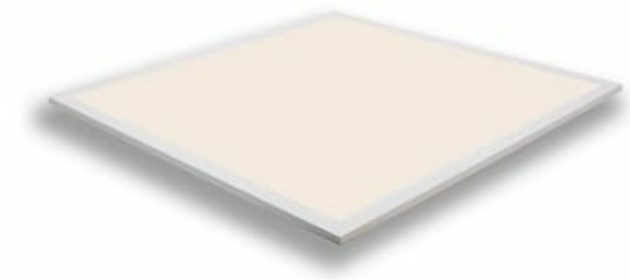

Panel | 60*60 | 4000K | White Frame
| UGR<19 | Triac Dim.

Article number: 174-188

This LED panel is suitable for installation in (suspended) ceilings of 60x60 cm. A hanging up method is also possible, using suspension cables or a surface mounting kit (see related products). The smooth light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

Features

- High quality external Triac dimmable driver with optimum heat regulation
- Plug & Play due connection cable and euro plug
- High light efficiency of >100 Lm/W
- 5 year warranty
- UGR <19 value for minimal discomfort from glare and high productivity
- Also available with a dimmable Dali or 1-10V LED driver

Specifications

Size	60 x 60 cm	CRI value	>80	Cable length	100 cm
Input voltage	220-240V	UGR value	UGR<19	Connection type	Europlug
Power	36 Watt	Driver	Incl. external driver	Housing material	Aluminium
Luminous flux	3600 Lm	Power factor	>0.97	Housing color	White (powder coating)
Luminous efficiency	>100 Lm/W	Beam angle	90°	Material diffuser	PMMA (Polymethyl methacrylate)
Color temperature	4000K	IP rate	IP20	Lighting method	Edge-lit
Light color	Natural white	Length	595 mm	Certification mark	CE, RoHS
Dimming method	Triac	Width	595 mm	Warranty	5 years
Lifetime	L80B50 (50.000 hours)	Height	11 mm		



Line Drawings

