


2021-9-10 | Data subject to change without notice

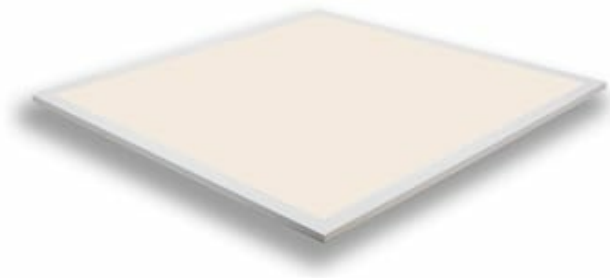

## Panel | 60\*60 | 4000K | White Frame | UGR<19 | 1-10V Dim.

Article number: 174-189

This LED panel is suitable for installation in (suspended) ceilings of 60x60 cm. A hanging up method is also possible, using suspension cables or a surface mounting kit (see related products). The smooth, soft and flicker-free light spread by the LED panel, makes it extremely suitable for use in offices and retail spaces, but also think of indoor lighting of schools and any other public spaces.

### Features

- High quality external 1-10V dimmable driver with optimum heat regulation
- Flicker-free (1%)
- Plug & Play due connection cable and euro plug
- High light efficiency of >100 Lm/W
- 5 year warranty
- UGR <19 value for minimal discomfort from glare and high productivity
- Also available with a dimmable Dali or Triac LED driver

## Specifications

Size	60 x 60 cm	CRI value	>80	Height	11 mm
Input voltage	220-240V	UGR value	UGR<19	Cable length	100 cm
Power	36 Watt	Driver	Incl. external driver	Connection type	Europlug
Luminous flux	3600 Lm	Power factor	>0.97	Housing material	Aluminium
Luminous efficiency	>100 Lm/W	Flicker-free	Yes 1%	Housing color	White (powder coating)
Color temperature	4000K	Beam angle	90°	Material diffuser	PMMA (Polymethyl methacrylate)
Light color	Natural white	IP rate	IP20	Lighting method	Edge-lit
Dimming method	1-10V	Length	595 mm	Certification mark	CE, RoHS
Lifetime	L80B50 (50.000 hours)	Width	595 mm	Warranty	5 years



## Line Drawings

