


1sternehotel.de

Installation instructions for rear pull-out Marco Polo with kitchen

1. Take the pull-out drawer out of the box and place it flat on the floor next to the box. Use a vacuum cleaner to remove the polystyrene that is stuck to the drawer.
2. Make sure that the lock on the back of the pull-out is not blocked; the lock should be as shown in the photo on the right. When delivered, nothing should be blocked.

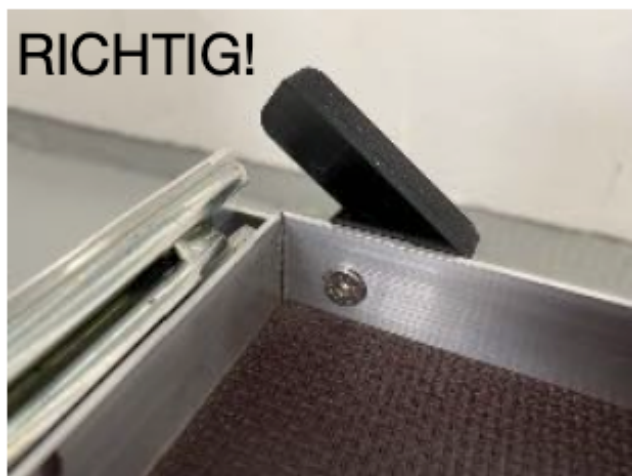


3. Press the two front black catches down with your index fingers and pull the drawer of the pull-out fully out with your thumbs until the drawer stops.
4. To remove the drawer from the hinges, push the catches in the hinges up on one side and down on the other.
5. Remove the drawer and place it on the spread-out cardboard.
6. Place the extension on the back on the floor and insert the four supplied screws, including washers, from the top side, through the holes of the extension. Screw the four threaded bolts from below, a few turns, onto the screws.



- Carefully place the extract in the background section of the Marco Polo. **Be careful with the wooden floor and the kitchen.**
- Turn the threaded bolts in the direction of travel and let the bolts drop into the seat rails. Align the pull-out straight in the vehicle.

Tighten firmly

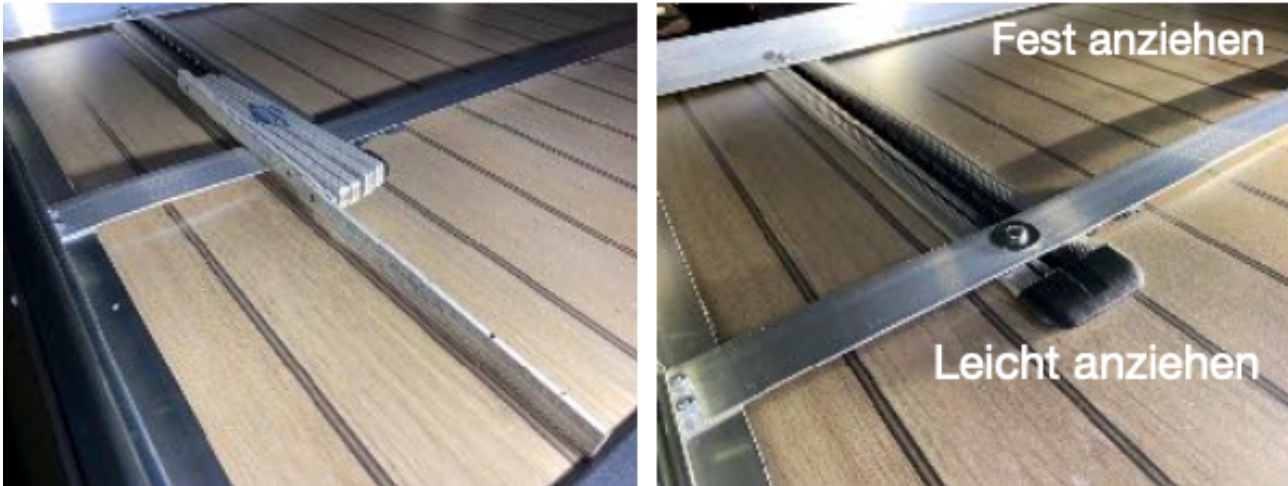

Tighten slightly

- Measure the distance from the plastic trim to the aluminium rail. The distance should be 26cm and the rubber buffers should now be next to the seat rails and in front of the plastic trim.
- Tighten the rear screws of the drawer firmly. Only tighten the front screws hand-tight so that the drawer does not warp.
The aluminium frame on the side should now be at a 90-degree angle to the floor. If not, loosen the front screws again a little.
- Carefully slide the drawer evenly on both sides into the pull-out. **MAKE SURE** that the two plastic catches on the left and right are not pushed up when you slide the drawer in, as these could otherwise break.
- Carefully slide the drawer in and out two or three times.
- Once the drawer glides smoothly in the runners, the rear pull-out is fully assembled.
- To pull out the drawer, press the two catches down with your index fingers and pull the drawer out with your thumbs (as in step 3).
- If the vehicle is ever parked on a downhill slope, you can use the lock on the back of the drawer to lock the pull-out when it is extended (see photo 2 / photo 1). Before pushing in release the lock!

Have fun with the rear extension. You can find accessories for the rear extension in the category 'Camping | Outdoor | Off-road' under rear extension and accessories.