

LiFePO4 - 12V 50Ah

JB-LFP12-50CC

Dimension (with case)

Length	195mm
Width	165mm
Height	175mm
Weight	6,1kg



Electrical Specification

Nominal voltage	12V (12,8V)
Nominal capacity	50Ah
Energy	640Wh
Resistance	≤ 50mΩ
Self discharge	<3% / month
Efficiency	99%

Mechanical Specifications

Terminal type	M6 Screw
Case material	ABS
Enclosure protection	IP65
Cell type	prismatic

Charge Specifications

Recommend charge current	10-25A
Max. charge current	50A
BMS charge voltage cut-off	14,6V
Reconnect voltage	14,2 - 14,5V
Balancing current	2A
Balancing voltage	3,5V
Charge current (-20 to -10°C)	≤ 0,05C

Discharge Specifications

max. cont discharge	50A
peak discharge current	100A
BMS discharge current	200A±100A (10mS)
recommend cut-off voltage	10-11V
BMS discharge cut-off	9,2V
short circuit protection	200-600 μs

Temperature Specifications

Discharge temperature	-20 to 60°C
Charge temperature	0 - 45°C
Storage temperature	-20 to 40°C
BMS high temperature	80°C
Reconnect temperature	50°C

Connection information

max. modules in series	2
max. modules parallel	4

Other customise service

Smart function: RS485/RS232/Canbus
or Bluetooth

Features & Benefits

* High cycle life:	>1000 times @ 80% DOD for effectively lower cost of ownership
* Built-in BMS Protection:	Battery Management System are incorporated to protect battery from over charging / over discharging / short circuit
* Light weight:	Dry power lithium batteries has higher energy density wh/kg also being up to 1/3 of SLA battery
* Wide operating temp. range	Suitable for users in a wider range of application where ambient temperature is unusually high: up to +60°C





Suitable applications

* Lithium Iron Phosphate can be used in any application that would normally use Lead Acid, GEL or AGM type batteries.

* Lead acid or gel batteries can be easily replaced by LiFePO4 batteries.
LiFePO4 in 4S = 12.8 V and 8S = 25.6 V is close to lead-acid equivalents.

* Suitable applications included caravan, marine, golf carts, solar storage, remote monitoring, switching applications

Performance characteristics

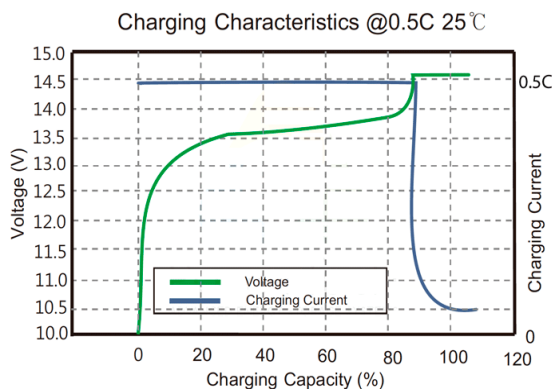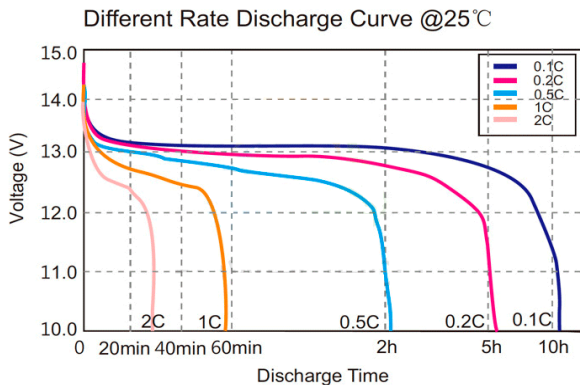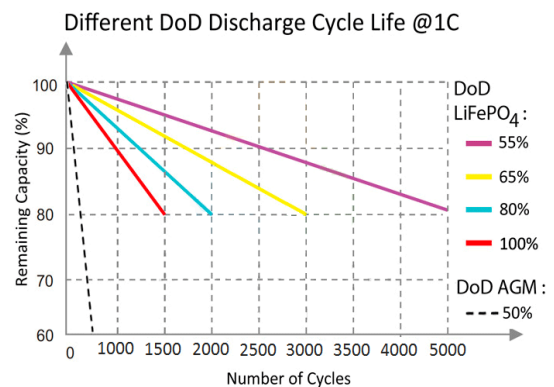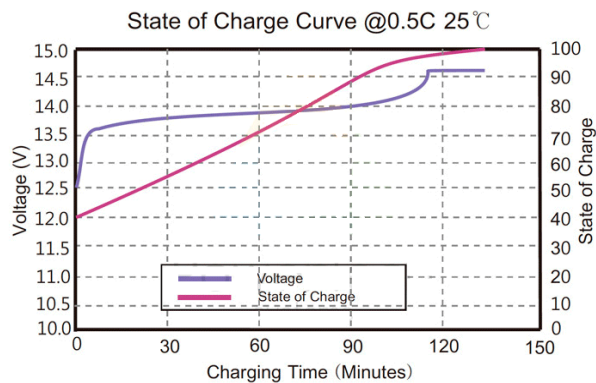

Cautions

- Do NOT expose the battery to water
- Do NOT expose the battery to fire & high temperature
- Do NOT short circuit, crush or disassemble
- Only use LiFePO4 charger
- Store at 50% capacity, recharge every 3 months.
- The storage area should be clean, cool, dry and ventilated

Just Battery Technology UG (hb) - Siemensstr. 45 - 48619 Heek - Germany

Phone: +49 2568 9338884 - info@jubatec.eu - <https://www.jubatec.eu>