

Mono product parameters



Model name	THMLd-4D/3HBp-A	THMLd-6D/3HBp-A	THMLd-8D/3HBp-A	THMLd-10D/3HBp-A	THMLd-12D/3HBp-A	THMLd-14D/3HBp-A	THMLd-16D/3HBp-A	THMLd-12S/6(9)HBp-A	THMLd-14S/6(9)HBp-A	THMLd-16S/6(9)HBp-A	
Power supply	220-240/1/50			220-240/1/50			380-415/3/50				
Heating A7W35	Capacity	4.20	6.22	8.00	9.50	12.10	14.50	16.00	12.10	14.50	16.00
	Rated input	0.82	1.27	1.60	1.98	2.42	3.05	3.54	2.42	3.05	3.54
	COP	5.10	4.90	5.00	4.80	5.00	4.75	4.52	5.00	4.75	4.52
Heating A7W45	Capacity	4.35	6.35	8.00	9.50	12.05	14.25	16.00	12.05	14.25	16.00
	Rated input	1.14	1.69	2.11	2.60	3.14	3.83	4.42	3.14	3.83	4.42
	COP	3.80	3.75	3.80	3.65	3.84	3.73	3.62	3.84	3.73	3.62
Heating A7W55	Capacity	4.40	6.00	7.40	9.00	12.00	14.00	16.00	12.00	14.00	16.00
	Rated input	1.49	2.03	2.38	3.00	3.85	4.65	5.49	3.85	4.65	5.49
	COP	2.95	2.96	3.11	3.00	3.12	3.01	2.91	3.12	3.01	2.91
Cooling A35W18	Capacity	4.50	6.00	8.00	9.50	12.00	13.50	15.00	12.00	13.50	15.00
	Rated input	0.81	1.22	1.67	2.07	3.00	3.60	4.35	3.00	3.60	4.35
	EER	5.55	4.92	4.80	4.60	4.00	3.75	3.44	4.00	3.75	3.44
Cooling A35W7	Capacity	4.50	6.00	7.00	8.00	11.60	12.95	14.30	11.60	12.95	14.30
	Rated input	1.28	1.93	2.14	2.53	4.20	4.98	5.70	4.20	4.98	5.70
	EER	3.50	3.11	3.27	3.16	2.76	2.60	2.51	2.76	2.60	2.51
SCOP ²	LWT at 35°C	4.60	4.65	5.07	5.05	4.77	4.63	4.56	4.77	4.63	4.56
	LWT at 55°C	3.35	3.49	3.47	3.51	3.48	3.43	3.44	3.54	3.46	3.49
Seasonal space heating energy efficiency class ¹	LWT at 35°C	A+++									
	LWT at 55°C	A++									
Electric heater power input	kW										
MOP(Maximum overcurrent protection) ³	A										
MCA(Minimum circuit amps)	A										
Compressor	Twin rotary DC inverter										
Outdoor fan	Brushless DC motor										
Throttle type	Electronic expansion valve										
Air side heat exchanger	Finned tube										
Water side heat exchanger	Plate type										
Refrigerant	Type	R32									
	Factory charge	kg	1.30	1.30	1.40	1.40	1.74	1.74	1.74	1.74	1.74
Sound power level ⁴	dB										
Sound pressure level ⁵	dB										
Net dimensions (W×H×D)	mm										
Packing dimension (W×H×D)	mm										
Net/Gross weight	kg										
Piping connections	R1*										
Operation range	Cooling	°C									
	Heating	°C									
	DHW	°C									
	DHW	°C									
Water outlet	Cooling	°C									
	Heating	°C									
	DHW	°C									

Abbreviations:

DHW: Domestic hot water
LWT: Leaving water temperature

Notes:

- Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811/2013; (EU) No 813/2013; OJ 2014/C 207/02.
- Seasonal space heating energy efficiency class tested in average climate conditions.
- Sound power level test condition: EN12102-1.
- Sound pressure level is the maximum value tested under the two conditions of A7W35 and A35W18.

Split product parameters



Model name	THF-4D/HBpO-A	THF-6D/HBpO-A	THF-8D/HBpO-B	THF-10D/HBpO-B	THF-12D/HBpO-A	THF-14D/HBpO-A	THF-16D/HBpO-A	THF-12S/HBpO-A	THF-14S/HBpO-A	THF-16S/HBpO-A	
Power supply	220-240/1/50			220-240/1/50			380-415/3/50				
Heating A7W35	Capacity	4.20	6.22	8.00	9.50	12.10	14.50	16.00	12.10	14.50	16.00
	Rated input	0.82	1.27	1.60	1.98	2.42	3.05	3.54	2.42	3.05	3.54
	COP	5.10	4.90	5.00	4.80	5.00	4.75	4.52	5.00	4.75	4.52
Heating A7W45	Capacity	4.35	6.35	8.00	9.50	12.05	14.25	16.00	12.05	14.25	16.00
	Rated input	1.14	1.69	2.11	2.60	3.14	3.83	4.42	3.14	3.83	4.42
	COP	3.80	3.75	3.80	3.65	3.84	3.73	3.62	3.84	3.73	3.62
Heating A7W55	Capacity	4.40	6.00	7.40	9.00	12.00	14.00	16.00	12.00	14.00	16.00
	Rated input	1.49	2.03	2.38	3.00	3.85	4.65	5.49	3.85	4.65	5.49
	COP	2.95	2.96	3.11	3.00	3.12	3.01	2.91	3.12	3.01	2.91
Cooling A35W18	Capacity	4.50	6.00	8.00	9.50	12.00	13.50	15.00	12.00	13.50	15.00
	Rated input	0.81	1.22	1.67	2.07	3.00	3.60	4.39	3.00	3.60	4.39
	EER	5.55	4.92	4.80	4.60	4.00	3.75	3.42	4.00	3.75	3.42
Cooling A35W7	Capacity	4.50	6.00	7.00	8.00	11.60	12.95	14.30	11.60	12.95	14.30
	Rated input	1.28	1.93	2.14	2.53	4.20	4.98	5.70	4.20	4.98	5.70
	EER	3.50	3.11	3.27	3.16	2.76	2.60	2.51	2.76	2.60	2.51
SCOP ²	LWT at 35°C	4.60	4.65	5.07	5.05	4.78	4.63	4.56	4.70	4.58	4.56
	LWT at 55°C	3.35	3.49	3.47	3.51	3.48	3.47	3.48	3.48	3.35	3.44
Seasonal space heating energy efficiency class ¹	LWT at 35°C	A+++									
	LWT at 55°C	A++									
MOP(Maximum overcurrent protection) ³	A										
MCA(Minimum circuit amps)	A										
Compressor	Twin rotary DC inverter										
Outdoor fan	Brushless DC motor										
Throttle type	Electronic expansion valve										
Air side heat exchanger	Finned tube										
Refrigerant	Type	R32									
	Factory charge	kg	1.30	1.30	1.65	1.65	1.84	1.84	1.84	1.84	1.84
Sound power level ⁴	dB										
Sound pressure level ⁵	dB										
Net dimensions (W×H×D)	mm										
Packing dimensions(W×H×D)	mm										
Net/Gross weight	kg										
Piping connections	Type	Flare									
	Liquid Dia.	mm									
	Gas Dia.	mm									
	Min. pipelength	m									
Installation height	Outdoor unit above	m									
	Outdoor unit below	m									
Operating range	Cooling	°C									
	Heating	°C									
	DHW	°C									

Notes:

- Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811/2013; (EU) No 813/2013; OJ 2014/C 207/02:2014.
- Seasonal space heating energy efficiency class tested in average climate conditions.
- Test standard: EN12102-1.
- Sound pressure level is the maximum value tested under the two conditions of A7W35 and A35W18.



Model name	SMKLd-4(6)D/3HBp-A	SMKLd-8(10)D/3HBp-B	SMKLd-12(14,16)D/3HBp-A	
Function	Heating and cooling			
Water outlet	Cooling	°C		
	Heating	°C		
	DHW	°C		
Power supply	V/Ph/Hz			
Electric heater power input	kW			
Sound power level ¹	dB			
Sound pressure level(1m) ²	dB			
Net dimensions (W×H×D)	mm			
Packed dimensions (W×H×D)	mm			
Net/gross weight	kg			
Water circuit	Piping connections	inch		
	Safety valve set pressure	Mpa		
	Drainage pipe connection	Volume	L	
		Max. water pressure	MPa	
Expansion tank	Pre-pressure	Mpa		
	Heat exchanger	Type		
Refrigerant circuit	water pump head	m		
	Liquid Dia.	mm		
	Gas Dia.	mm		
Operating temperature range	Excessive operating refrigerant pressure	MPa		
	Ambient temperature	°C		
Water pressure	MPa			

Notes:

- Test standard: EN12102-1.
- Sound pressure level is the maximum value tested under the two conditions of Note3 and Note4 for different combination between outdoor unit and hydronic box.
- Outdoor air temperature 7°C DB, 85% RH; EWT 30°C, LWT 35°C.
- Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.

TECHNICAL SUPPORT, GLOBAL SALES COMPANY:

GD TCL INTELLIGENT HEATING & VENTILATING EQUIPMENT CO., LTD.
Address: No.7 Yuanlin Road, Nantou, Zhongshan, Guangdong, PR China
Web: hao.tcl.com E-mail: hvac@tcl.com




R32 Tri-thermal ATW Heat Pump

Heating, cooling, hot water with complete solutions to the creative life



Seasonal space heating energy efficiency

ηs average up to A+++ at 35°C
ηs average up to A++ at 55°C



The maximum of leaving water temperature is 65°C





Versatility

● Heating, cooling, hot water with complete solutions, to the creative life

Tri-thermal is an integrated system that provides space heating and cooling as well as domestic hot water, offering a complete, all-year-round solution which can remove the need for traditional gas or oil boilers, or work together with them.



Compact fan coil unit cooling

- Ultra-thin body, comfortable and beautiful
- Multi-angle and all-directional wind supply




Diversified heating

- Heating by floor heating, radiator and fan coil unit
- Safe and comfort

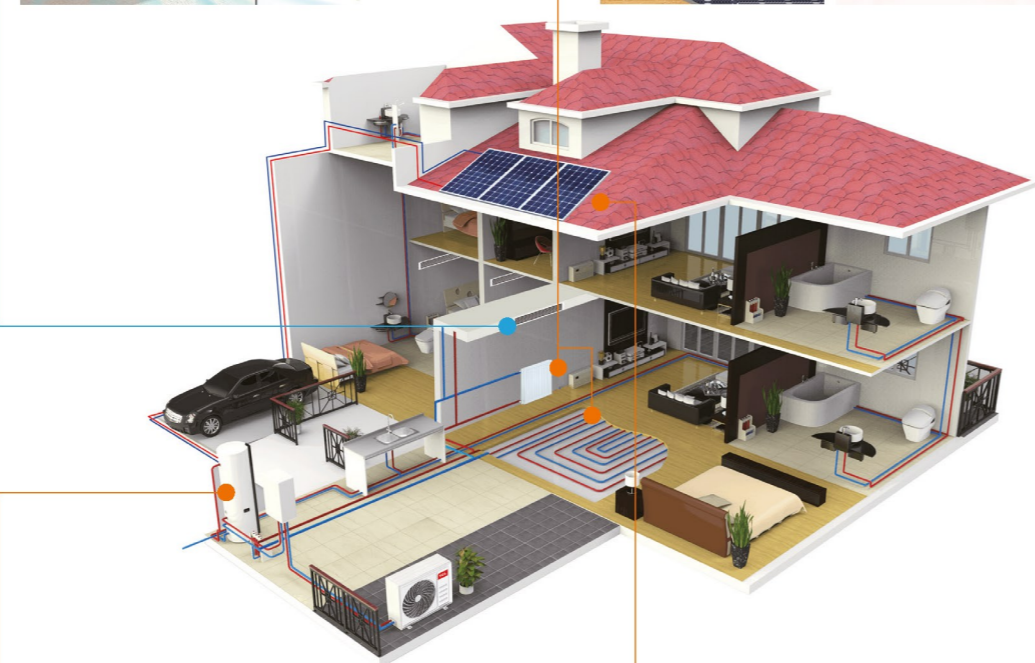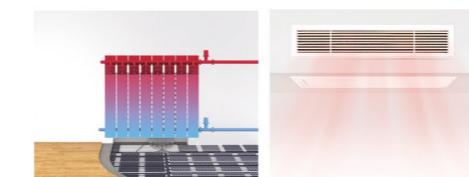

Domestic hot water

- Provide DHW in time, heating quickly
- The maximum of leaving water temperature is 65°C

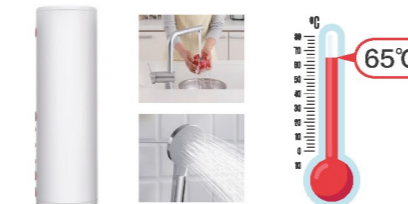

Solar kit

- Work only & work with heat pump for DHW



* Auxiliary heat source

- Link with traditional gas boilers, industrial hot water and electric auxiliary heating

High Efficient and Energy Saving

● Well-known brand DC inverter compressor (GMCC)

High reliability electrical design

- High-current resistant & high-temperature resistant.

Large pressure ratio design

- Low suction pressure
- High exhaust pressure
- Heating at low ambient temperature

Low oil output design

- Optimized internal tank design
- Less lubricating oil required
- Effectively solves the problem of oil return



DC Inverter motor design

- High efficiency, the highest SCOP is 5.07

Low noise vibration design

- Vibration optimization of twin rotor
- Noise optimization of double-layer mufflers

High reliability volume design

- Large oil storage space
- Suitable for use in partial load conditions and long-pipe

● High efficient L-type heat exchanger


Adopting advanced 3-D dynamic analysis and cross-flow path design, air volume increased 8%, heat exchange more efficient.

Internal thread heat transfer pipe

- Using hydrophilic anti-corrosive fins, heat transfer efficiency increased 6%.


Corrugated fin

- Applying inner thread tube with 10% higher heat exchange efficiency.




● Stepless inverter fan motor

- Realize stepless speed regulation, and reduce power consumption by 20% compared with AC motors
- Original built-in drive, high motor efficiency, more reliable
- Stepless regulation of air volume, precise control
- Quiet operation
- Insulation grade E



● Plate heat exchanger

- Withstand high temperature and high pressure
- Compact design, smaller volume and less pressure drop
- High anti-corrosion performance
- High thermal efficiency and lower fouling factor
- Easy installation and maintenance
- Under the same pressure loss, the heat transfer coefficient of the plate heat exchanger is 3-5 times higher than that of the tubular heat exchanger, covering an area of 1/3 of the tubular heat exchanger.



● Multiple certifications



● Environmental friendly refrigerant


- The GWP of R32 is 675
- CO₂ equivalent is decreased 68% compared with R410a
- Save clients energy and protect the environment



Safe and Comfort

● Anti-bacteria mode

- Designed to guarantee our safe and health.
- It works by heating the water to about 70 degrees.

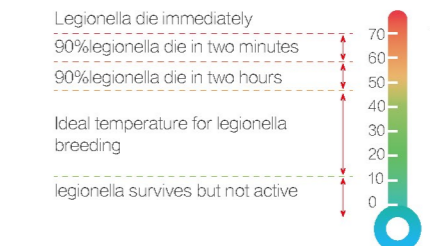

● Low level of noise

- Multiple silent modes are optional: Silent mode, night silent mode, super silent mode.
- Optimized right & back side plates design: Based on the 3-D simulation, which greatly decrease the vibration and running noise.



● Provide DHW in time

- Water pump: Running smoothly



- Electrical heater: Heat DHW quickly. As a back-up facility for inclement weather



- Solar kit heater: Energy saving




● 3-zone control

- Connect max 3 zones at the same time and achieve different temperatures control in different zones.



Intelligent control

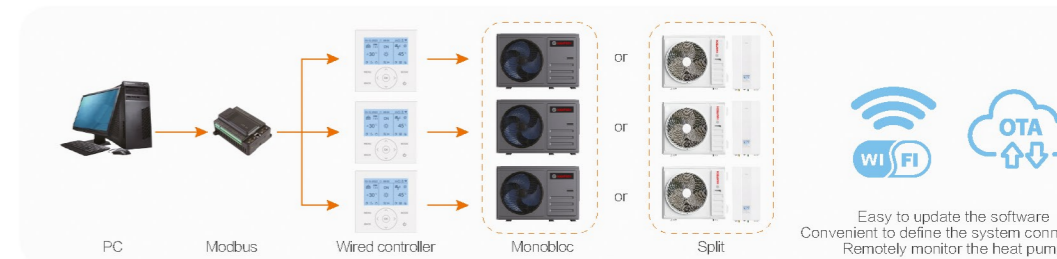

● Wired controller

- Liquid crystal, two-way communication, backlight at night
- Access to wifi with internet control
- Multiple languages are available
- Can set the parameters and query for faults
- Daily schedule and weekly schedule accurately control time and operation mode to prevent forgetting



● APP controller

- Modes adjustment
- Cascade control
- Power consumption record
- Sanitary hot water priority mode
- Unit status & fault information display
- Temp, Pump flow rate, timer setting etc.

