NEXTORCH® Tel. +49(0) 2129 91639-00 Fax. +49(0) 2129 91639-99 Email: email@nextorch.de International Distribution Inquiries: United States: info.usa@nextorch.com Germany: email@nextorch.de South Africa: info@nextorch.co.za International: info@nextorch.com To Learn More: Vist: www.nextorch.com Or contact your sales rep www.nextorch.de



ABOUT US

NEXTORCH°





NEXTORCH is one of the world's leading manufacturers of illumination tools and specialized equipment for military, law enforcement, first responder, tactical, and outdoor applications.

Our approach to product development begins with an in-depth understanding of our customers' needs and preferences. Based on that knowledge, we focus our state-of-the-art research and development resources to create the finest high-performance equipment possible. Through our relentless commitment to product innovation, we have earned more than 150 patents and numerous industry awards. We have also earned the loyalty of professional end users in more than 100 countries.


If you only trust the best, trust NEXTORCH.










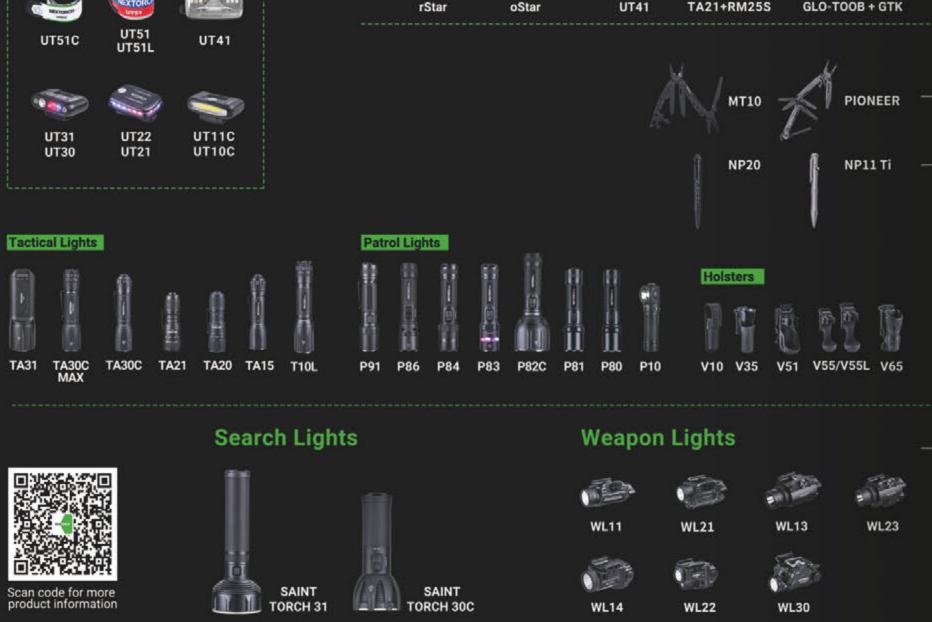



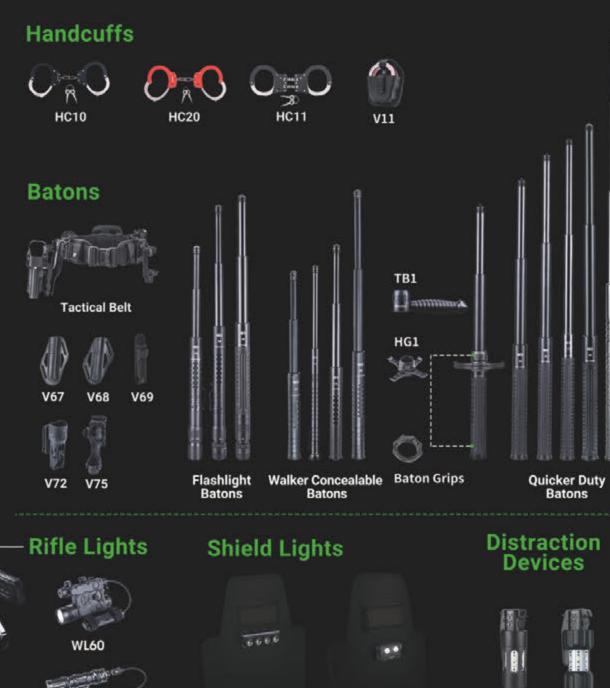





WL50 IR

P20 P21







ILLUMINATION

07-10 SEARCH LIGHTS

11-22 TACTICAL FLASHLIGHTS

23-32 PATROL FLASHLIGHTS

33 LEP FLASHLIGHTS

34-38 OUTDOOR & EVERYDAY CARRY LIGHTS

39-42 PENLIGHTS & KEYCHAIN LIGHTS



43-50 WEAPON LIGHTS

51-54 HUNTING LIGHTS

55-58 HELMET LIGHTS

59-64 HEADLAMPS

65-72 SPECIALIZED LIGHTS

73-82 MULTI-FUNCTION & CLIP LIGHTS

83-84 GLO-TOOBS


85-88 ACCESSORIES



NEX BATONS

89-98 NEX BATONS

99-100 ACCESSORIES

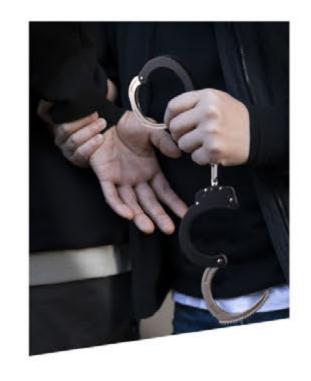

101-104 HANDCUFFS

105-108 MULTITOOLS

109-110 TACTICAL BELTS

111-112 MERCHANDIZING DISPLAYS

113 BRAND MERCHANDISE

115-118 COMPATIBILITY





Waterproof Container

09













- * High-performance LEDs deliver up to 20,000 lumens with a beam distance of 740 meters
- * Six standard modes includes: High, medium, low, eco, strobe, and S.O.S * Equipped with a four-LED battery level indicator for instant power monitoring
- * Powered by a 6 × 4800 mAh rechargeable battery pack that doubles as a waterproof

Modes	20,000 lm / 6,000 lm / 1,700 lm / 90 lm / Strobe / S.O.S
Runtime	2 h 15 min / 3 h 30 min / 8 h 30 min / 81 h / - / -
Beam Distance	740 m / 410 m / 212 m / 50 m / - / -
Beam Intensity	138,900 cd / 42,025 cd / 11,236 cd / 625 cd / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	6 × 4800 mAh rechargeable battery pack (included)
Dimensions	285 mm × 106 mm × 50 mm / 11.22 × 4.17 × 1.97 in
Weight	1,500 g / 52.9 oz (with battery)



The 6 × 4800 mAh Battery Pack Also Functions as a Power Bank



Includes Protective Carry / Storage Case



High-Performance LEDS











- Features two side switches for momentary on, turbo, and quick standard mode selections
 Switchable to 7 modes: high, medium, low, eco, strobe, Turbo, and S.O.S
 Four LED battery level indicator

Nylon Shoulder Strap

USB-C Cable (C2C)

45W Charging Block

- * High-speed 45W USB-C two-way charging design, charges fully in 1h 45 mins


 * Powered by a 3 * 4800 mAh rechargeable battery pack that doubles as a waterproof

Modes	15,000 km / 10,000 km / 5,000 km / 1,000 km / 90 km / Strobe / SOS
Runtime	- / 2 h 45 min / 3 h 45 min / 6 h 30 min / 52 h / - / -
Beam Distance	515 m / 415 m / 290 m / 135 m / 35 m / - / -
Beam Intensity	66,306 cd / 43,056 cd / 21,025 cd / 4,556 cd / 306 cd
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	3 × 4800 mAh Li-ion battery pack
Dimensions	202 mm × 84 mm × 50 mm / 7.95 × 3.31 × 1.97 in
Weight	787 g / 27.76 oz (with battery)






Optional Accessory HM30 Saint Torch Handle





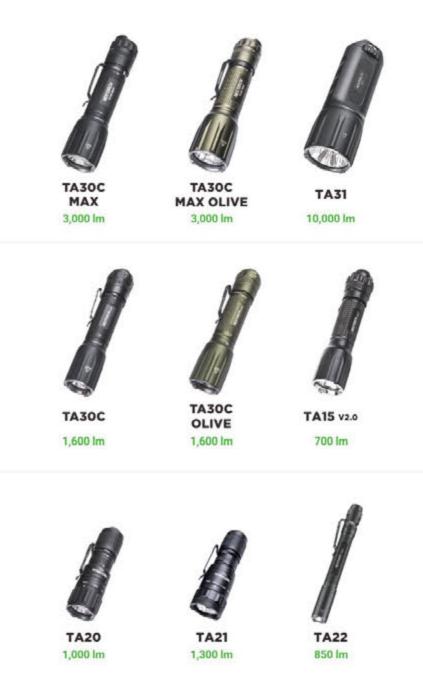

TA SERIES
TACTICAL FLASHLIGHTS

The NEXTORCH TA Series tactical flashlights represent the pinnacle of reliability, power, and innovation, making them indispensable tools for law enforcement, military professionals, and tactical enthusiasts. Built with cutting-edge technology and designed to excel in the most demanding environments, the TA Series offers unparalleled performance, durability, and versatility to meet the diverse needs of its users. At the heart of the TA Series is the patented One-Step-Strobe function, a feature designed for decisive tactical advantage. Using the 2-stage tailcap switch a half-press actives momentary high, and a full-press gives instant access to strobe, delivering a powerful disorienting light that can neutralize threats or signal for help. This rapidresponse capability is invaluable in high-stress scenarios, ensuring users maintain control and adaptability when it matters most.





Variable Frequency One-Step-Strobe
Rapid activation from off or

any constant-on mode




Metal Dual-Function Tactical Tail Switch
Half-press for momentary-on and

Full-press for strobe



Rotate counterclockwise to switch between modes Low - Medium - High - Strobe

Rotating Magnetic Dial



Nano-Ceramic Strike Bezel

With a hardness second only to diamond, the nano-ceramic strike points are designed to efficiently break windows, making it an essential tool for rescue operations and self-defense.



Waterproof & Impact Resistant

IPX8 waterproof and 2-meter impact resistant



Optional Accessories

- 1 Tactical Rings
- 2 Quick-Draw Holsters




TA30C + FR-1 + V35

Modes	1,600 lm / 330 lm / 20 lm / Momentary On / Strobe
Runtime	2 h 30 min / 4 h 30min / 50 h / - / -
Beam Distance	303 m / 130 m / 24 m / - / -
Beam Intensity	22,952 cd / 4,225 cd / 144 cd / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 18650 rechargeable battery or 2 x CR123A
Dimensions	136 mm × 30 mm × 23 mm / 5.35 × 1.18 × 0.91 in
Weight	97 g / 3.42 oz (without battery)





LED Battery Indicator



2600 mAh Battery





TA30C MAX 3,000 Lumen One-Step-Strobe Tactical Flashlight

















* High-performance LED produces a maximum 3,000 lumen output for a beam distance

- of 390 meters

 * Patented One-Step-Strobe tail switch utilizes a half-press for momentary high-mode and
- full-press for strobe


 * Rotating magnetic tail cap allows easy one-handed mode selection

 * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and
- * LED battery level indicator

Modes	3,000 lm / 520 lm / 70 lm / Momentary On / Strobe	
Runtime	2 h 45 min / 5 h / 35 h / - / -	
Beam Distance	390 m / 160 m / 60 m / - / -	
Beam Intensity	38,025 cd / 6,400 cd / 900 cd / - / -	
Water Resistance	IPX8 (2 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 21700 rechargeable battery	
Dimensions	153 mm × 38 mm × 28 mm / 6.02 × 1.50 × 1.10 in	
Weight	153 g / 5.39 oz (without battery)	




Variable Frequency One-Step-Strobe





Rotating Magnetic Dial

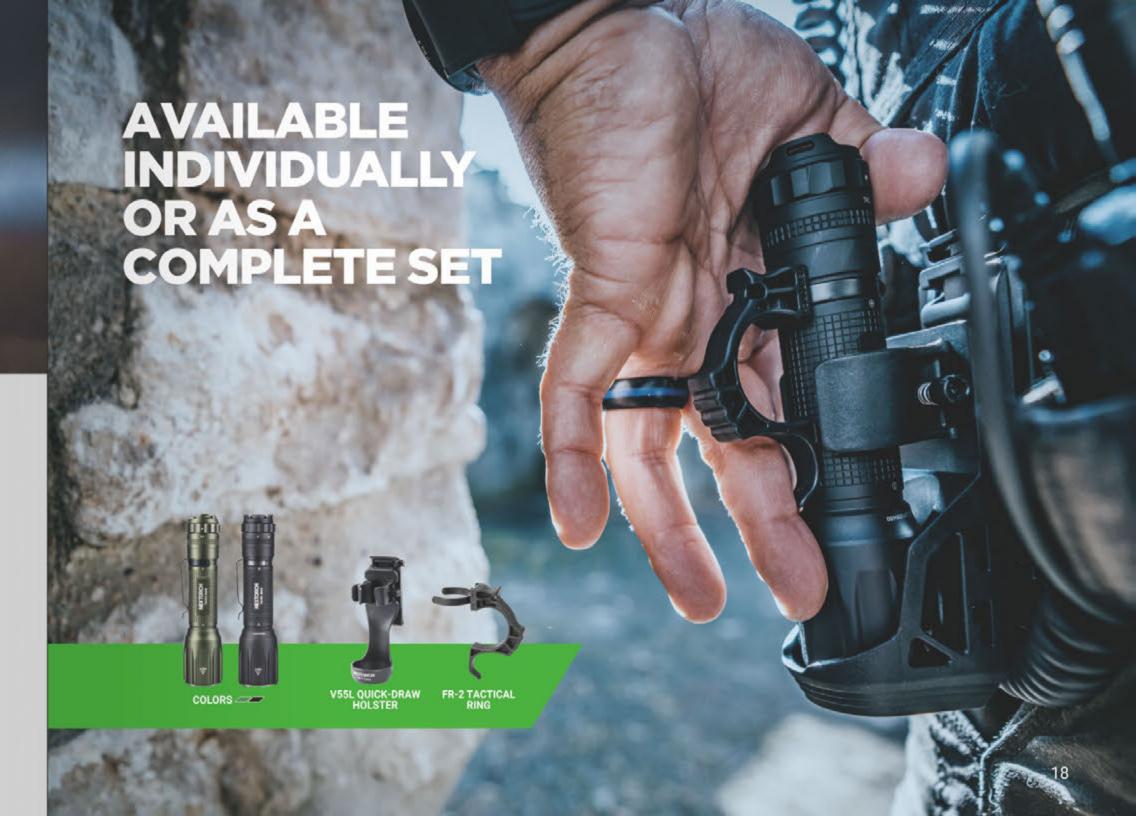







High-performance LEDs













- 10,000 lumen ultra high-output tactical searchlight
 Multi-mode design with magnetically controlled rotary switch to toggle between three modes: Lock, Duty, and Tac
 In Tac Mode, patented One-Step-Strobe tail switch utilizes a half-press for momentary
- Turbo and full-press for strobe
- * Proximity Sensor detects objects within 3ft and automatically reduces output to reduce reflection and overheating
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress andself-defense

Modes	10,000 lm / 6,000 lm / 1,500 lm / 320 lm / 20 lm
Runtime	- / 3 h 30min / 5 h / 15 h / 170 h
Beam Distance	380 m / 290 m / 145 m / 65 m / 15 m
Beam Intensity	36,100 cd / 21,025 cd / 5,256 cd / 1,056 cd / 42 cd
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	2 × 4800 mAh Li-ion battery pack
Dimensions	156 mm × 53 mm × 49 mm / 6.14 × 2.09 × 1.93 in
Weight	425 g / 14.99 oz (with battery)



Nano-Ceramic Glass Breakers



Internal 2600 mAh Batteries



USB-C Direct Charging

TA20

1,000 Lumen Tri-Mode Tactical Flashlight













- High-performance LED produces up to 1,000 lumens with a beam distance of 210 meters
 Ultra-compact tactical flashlight designed for duty and everyday use
 Tri-mode operation allows one-handed mode selection between lock, tactical, and duty
- * Offers seven modes: Lock, two tactical modes (momentary-on and tactical strobe), and
- four duty modes (three brightness levels and strobe)

 * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense

Modes	1,000 lm / 190 lm / 24 lm / Momentary On / Strobe
Runtime	1 h 15 min / 2 h 30 min / 24 h / - / -
Beam Distance	210 m / 85 m / 30 m / - / -
Beam Intensity	11,028 cd / 1,808 cd / 228 cd / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 16340 rechargeable battery or 1 x CR123A
Dimensions	100 mm × 30 mm × 23 mm / 3.94 × 1.18 × 0.91 in
Weight	89 g / 3.14 oz (without battery)

TA21

1,300 Lumen Dual Light Source EDC Tactical Flashlight













- High-performance LEDs produce up to 1,300 lumens with a beam distance of 160 meters
 Ultra-compact tactical flashlight designed for duty and everyday use
 Multi-mode operation allows one-handed mode selection between Tactical, Duty, Lock,
- and Red Light settings
- * Offers 9 modes: Lock, two tactical modes (momentary-on and tactical strobe), 3 modes for duty (three brightness levels) and three red light brighness levels
 * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense

Modes	1,300 lm / 230 lm / 30 lm / Momentary On / Strobe / Red
Runtime	1 h / 2 h 15min / 20 h / - / -
Beam Distance	160 m / 68 m / 24 m / - / -
Beam Intensity	6,400 cd / 1,156 cd / 144 cd / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 16340 rechargeable battery or 1 × CR123A
Dimensions	98 mm × 32 mm × 23 mm
Weight	97 g / 3.42 oz (without battery)









TA22

Rechargeable Tactical Penlight











- * Pen design combines compact portability with the advanced features of our tactical series.
 * Tac mode enables the use of One-Step-Strobe

- * Rotating dial allows smooth mode selection between Tactical, Duty, and Lock settings

 * Lock mode prevents accidental activation and overheating in your pocket

 * Powered by a single 10880 rechargeable battery or 2 × AAA batteries

 * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and

Modes	850 lm / 150 lm / 15 lm / Momentary On / Strobe
Runtime	1 h/2 h/15 h/-/-
Beam Distance	95m/2m/15m/-/-
Beam Intensity	2,256 cd / 400 cd / 40 cd / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 10880 or 2 × AAA batteries
Dimensions	149 mm × 16 mm × 14.4 mm / 5.87 × 0.63 × 0.567 in
Weight	41 g / 1.45 oz (without battery)



TA15 v2.0
















- * High-performance LED produces a maximum 700 lumen output for a beam distance
- Vari-Source design is compatible with AA, CR123A, 14500 rechargeable, and 16340 rechargeable batteries
- Rotating dial allows smooth mode selection between 3 brightness levels and constant strobe
 Patented One-Step-Strobe button provides momentary high with a half-press and momentary strobe with a full press

*****	200 to 1005 to 105 to 114 or 10 100 to 100 to
Modes	700 lm / 205 lm / 35 lm / Momentary On / Strobe
Runtime	30 min / 1 h 30 min / 2 h 15 min / - / -
Beam Distance	195 m / 100 m / 35 m / - / -
Beam Intensity	9,506 cd / 2,500 cd / 306 cd / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 14500 / 16340 / CR123A / AA battery
Dimensions	127 mm × 30 mm × 22 mm / 5.00 × 1.18 × 0.87 in
Weight	95 g / 3.35 oz (without battery)



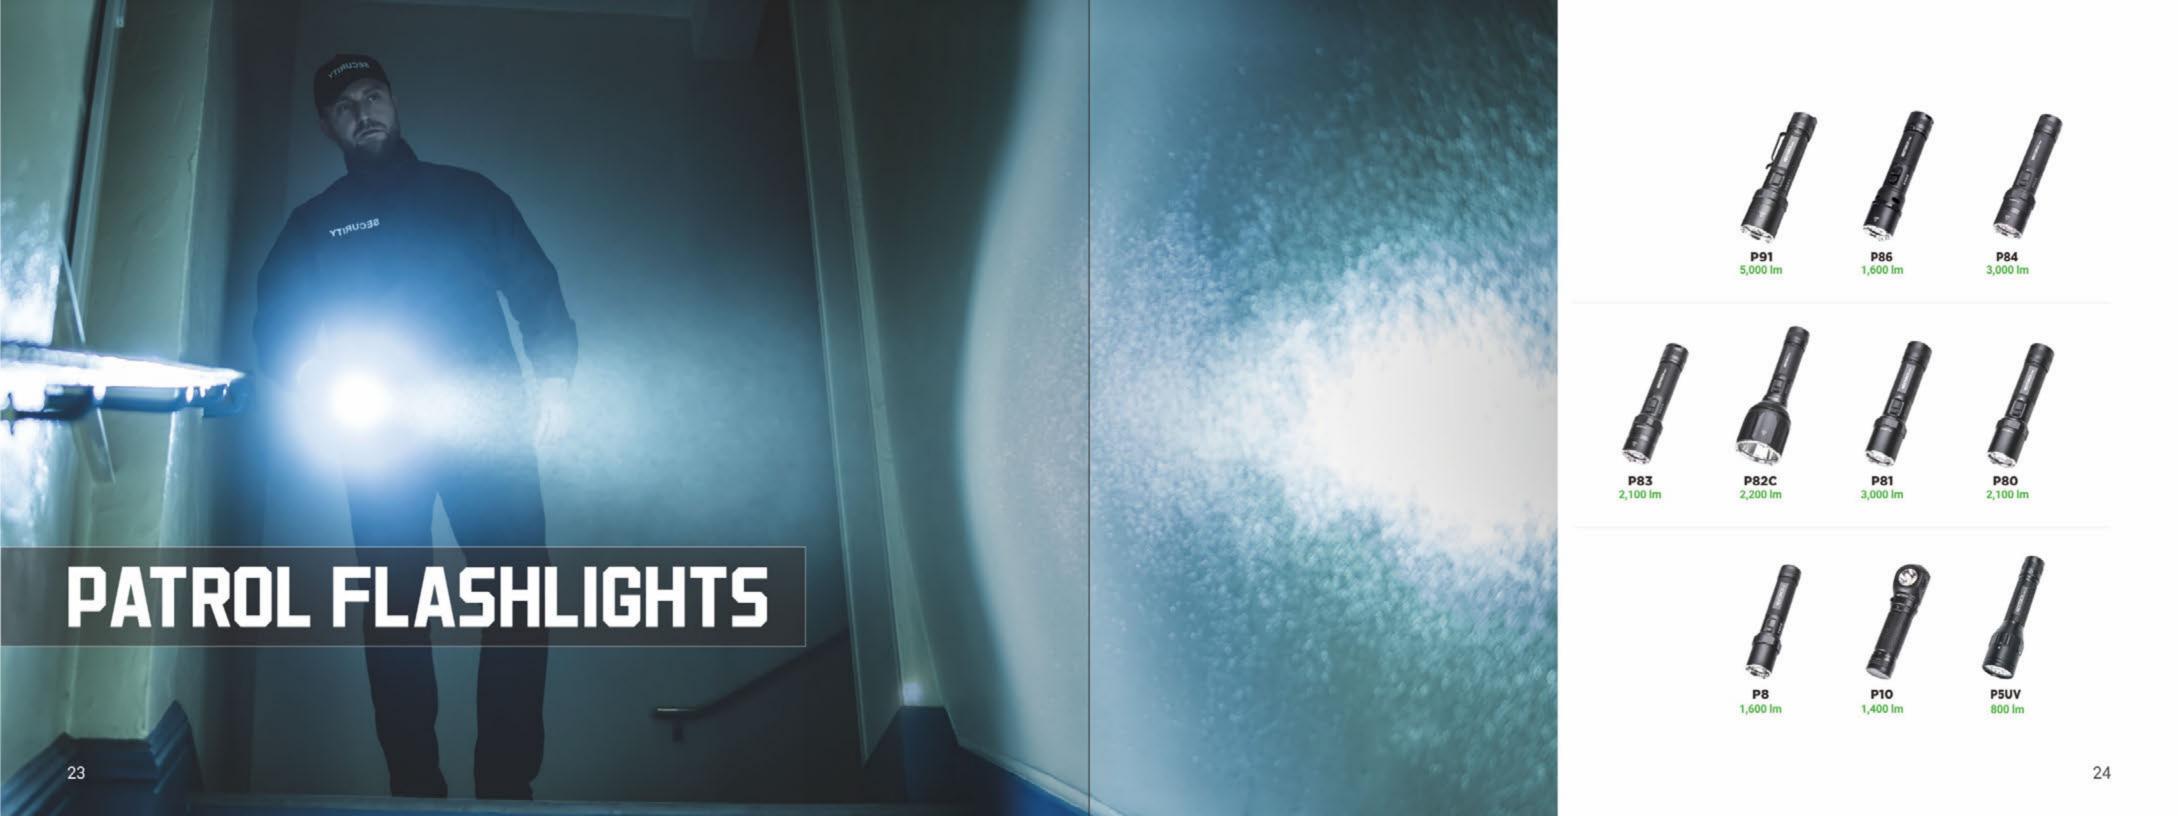

P SERIES PATROL FLASHLIGHTS

The NEXTORCH P Series flashlights are designed to seamlessly blend everyday carry convenience with tactical functionality. Featuring side switches for intuitive operation, these lights are built to withstand rigorous use, making them suitable for both daily tasks and demanding tactical scenarios. Trusted by law enforcement professionals and outdoor enthusiasts alike, the P Series offers reliable performance and versatility across in any situation.





Designated Strobe Button

Rapid Activation for a Tactical Advantage



High Performance LED Technology
Unmatched Brightness and Extended Range



2 Independent Side Switches

Front button activates strobe and the back button selects between the constant modes.



Nano-Ceramic Strike Bezel
With a hardness second only to diamond, the nano-ceramic strike points are designed to efficiently break windows, making it an essential

tool for rescue operations and self-defense.



USB-C Direct Charging

Hidden waterproof and dustproof
USB-C charging port.



LED Battery Indicator

Easily monitor battery levels and charging status



5,000 Lumen Ultra-Bright Tactical Duty Flashlight















- Delivers a powerful 5,000 lumen max output with 4 high-performance LEDs
 Independent dual switches: A One-Step-Strobe tactical tail switch for rapid use and a side duty switch for easy mode selection
 Powered by a 4800mAh rechargeable 21700 battery for extended runtime
 Includes an LED battery indicator

- * Hidden USB-C charging port ensures waterproof and dustproof durability

 * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense.

 * Smart temperature control prevents overheating during use

Modes	5,000 lm / 1,100 lm / 350 lm / 45 lm / Momentary On / Strobe	
Runtime	1 h 45 min / 2 h 45 min / 8 h / 60 h / - / -	
Beam Distance	300 m / 136 m / 80 m / 28 m / - / -	
Beam Intensity	22,500cd / 4,624 cd / 1,600 cd / 916 cd / - / -	
Water Resistance	IPX7 (1 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 21700 rechargeable battery	
Dimensions	160 mm × 36 mm × 28.5 mm / 6.3 × 1.42 × 1.12 in	
Weight	165 g / 5.82 oz (without battery)	



4 High-performance LEDs



Intelligent Temperature Control System



4800 mAh Battery



1,600 Lumen Flashlight with 120 dB Electronic Whistle



Traffic Wand V55L

COMPATIBLE ACCESSORIES











- Combines a 120 decibel electronic whistle and flashlight into one versatile tool
 Delivers a maximum 1,600 lumen output with a beam distance of up to 305 meters
 Powered by a rechargeable 18650 lithium-ion battery
 Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-
- Hidden USB-C charging port ensures waterproof and dustproof durability
 Includes an LED battery level indicator for quick power monitoring

Modes	1,600 lm / 240 lm / 25 lm / Momentary On
Runtime	2 h 15 min / 6 h 30 min / 60 h / -
Beam Distance	305 m / 110 m / 35 m / -
Beam Intensity	23,256 cd / 3,025 cd / 306 cd / -
Sound Pressure Level	120 dB
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 18650 rechargeable battery
Dimensions	160 mm × 37 mm × 28 mm / 6.29 × 1.46 × 1.10 in
Weight	191 g / 6.73 oz (without battery)



1,600 Lumen Output



LED Battery Indicator



2600 mAh Battery





P84

Duty Flashlight with Omnidirectional Signal Light







- * Maximum 3,000 lumen output for a beam distance of 260 meters
- * Three LED light sources: white, red, and blue
- * Provides four white light modes: Three brightness levels and strobe
- * Provides five red/blue LED modes: Solid red, solid blue, red flashing, blue flashing, and
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense

Modes	Primary: 3,000 lm / 600 lm / 36 lm / Momentary on / Strobe
	Auxiliary Red & Blue Flash / Red Flash / Blue Flash / Red Light / Blue Ligh
Runtime	2h45min/4h30min/60h/180h/105h/105h/50h/50h/-
Beam Distance	260 m / 118 m / 28 m / - / - / - / - / - / -
Beam Intensity	17,000 cd / 3,520 cd / 204 cd / - / - / - / - / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 21700 rechargeable battery
Dimensions	160 mm × 35 mm × 28.5 mm / 6.30 × 1.38 × 1.12 in
Weight	164 g / 5.78 oz (without battery)





Duty Flashlight with Omnidirectional Signal Light















- * Three LED light sources: white, red, and blue
- * Provides four white light modes: Three brightness levels and strobe
- * Provides five red/blue LED modes: Solid red, solid blue, red flashing, blue flashing, and
- red & blue flashing * Stainlage stud hazal with nano-paramic place breakers for americany agrees and self-defense

Modes	Primary: 2,100 lm / 350 lm / 25 lm / Momentary on / Strobe
	Auxillary: Red & Blue Flash / Red Flash / Blue Flash / Red Light / Blue Light
Runtime	2h30min/5h15min/85h/-/90h/60h/60h/30h/30h
Beam Distance	380 m / 160 m / 40 m / - / - / - / - / - / -
Beam Intensity	36,100 cd / 6,400 cd / 400 cd / - / - / - / - / - / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 x 18650 rechargeable battery
Dimensions	155 mm × 35 mm × 28.5 mm / 6.10 × 1.38 × 1.12 in
Weight	174 g / 6.14 oz (without battery)



P82C



2,200 Lumen Ultra-Long-Range Rechargeable Flashlight













- * High Optical Density (HOD) LED creates a maximum 2,200 lumen output for a beam distance of 1,100 meters
- * Ideal for long-range applications
- * Provides four white light modes: Three brightness levels and strobe
 * Two independent side switches: A Strobe switch towards the front for rapid use and a second duty switch for general mode selection
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense
- * Powered by 1 × 21700 rechargeable battery

Modes	2,200 lm / 430 lm / 40 lm / Momentary On / Strobe	
Runtime	3h/5h/85h/-/-	
Beam Distance	1,100 m / 430 m / 130 m / - / -	
Beam Intensity	302,500 cd / 46,225 cd / 4,225 cd / - / -	
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 21700 rechargeable battery	
Dimensions	193 mm × 61 mm × 28.5 mm	
Weight	281 g / 9.91 oz (without battery)	



3,000 Lumen One-Step-Strobe Rechargeable Flashlight













- Provides four white light modes: Three brightness levels and strobe
 Two independent side switches: A Strobe switch towards the front for rapid use and a second duty switch for general mode selection
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense
 * Powered by 1 × 21700 rechargeable battery
- * LED battery level indicator

Modes	3,000 lm / 600 lm / 36 lm / Momentary On / Strobe	
Runtime	2 h 45 min / 4 h 30 min / 60 h / - / -	
Beam Distance	270 m / 118 m / 28 m / - / -	
Beam Intensity	18,225 cd / 3,481 cd / 196 cd / - / -	
Water Resistance	IPX7 (1 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 21700 rechargeable battery	
Dimensions	161 mm × 35 mm × 28.5 mm / 6.34 × 1.38 × 1.12 in	
Weight	174 g / 6.13 oz (without Battery)	







P80 2,100 Lumen One-Step-Strobe Rechargeable Flashlight














- * High-performance LED creates a maximum 2,100 lumen output for a beam distance of
- * Provides four white light modes: Three brightness levels and strobe
 * Two independent side switches: A Strobe switch towards the front for rapid use and a second duty switch for general mode selection
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense
 * Powered by 1 × 18650 rechargeable battery with USB-C direct charging port

Modes	2,100 lm / 350 lm / 25 lm / Momentary On / Strobe	
Runtime	2 h 30 min / 5 h 15 min / 85 h / - / -	
Beam Distance	380 m / 160 m / 40 m / - / -	
Beam Intensity	36,100 cd / 6,400 cd / 400 cd / - / -	
Water Resistance	IPX7 (1 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 x 18650 rechargeable battery	
Dimensions	156 mm × 35 mm × 28.5 mm	
Weight	183 g / 6.45 oz (without battery)	





1,600 Lumen High-Output Rechargeable Flashlight















- * Provides four white light modes: Three brightness levels and strobe

 * Two independent side switches: A Strobe switch towards the front for rapid use and a second duty switch for general mode selection
- * Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense

 * Powered by 1 × 18650 rechargeable battery with USB-C direct charging port

 * LED battery level indicator

Modes	1,600 lm / 350 lm / 20 lm / Momentary On / Strobe	
Runtime	2 h / 4 h 30 min / 80 h / - / -	
Beam Distance	252 m / 115 m / 25 m / - / -	
Beam Intensity	14,400 cd / 3,306 cd / 225 cd / - / -	
Water Resistance	IPX7 (1 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 18650 rechargeable battery	
Dimensions	140 mm × 28 mm × 24 mm / 5.51 × 1.10 × 0.94 in	
Weight	140 g / 4.93 oz (with battery)	



1,400 Lumen with Signal Mode Right-Angle Flashlight















- * Maximum 1,400 lumen white light output with a beam distance of 200 meters

 * Compact, right-angle design with pocket clip for hands-free, on-body wear

 * Provides four white light modes: Three brightness levels and strobe

 * Provides three red/blue LED modes: Red & Blue Flash, Red Beacon, and Blue Beacon

Modes	Primary: 1,400 lm / 200 lm / 25 lm / Momentary On / Strobe	
	Auxiliary: Red & Blue Flash / Red Beacon / Blue Beacon	
Runtime	3 h 30 min / 6 h / 55 h / - / - / 80 h / - / -	
Beam Distance	200 m / 70 m / 26 m / - / - / - / -	
Beam Intensity	10,000 cd / 1,220 cd / 169 cd / - / - / - / - / -	
Water Resistance	IPX8 (2 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 x 18650 rechargeable battery	
Dimensions	117.2 mm × 24 mm × 32.1 mm / 4.61 × 0.94 × 1.26 in	
Weight	91 g / 3.21 oz (without battery)	



White and Ultraviolet Ray Dual-Light Flashlight
















- * Patented 360* rotatable switch, providing smooth transition between different colors
 * Tail cap button for easy momentary activation or mode switching
- * Long-range smooth reflector, perfect beam profile
- * Powered by 1 × 18650 rechargeable battery or 2× CR123A batteries

Modes	800 lm - 1,000 mW / 45 lm - 105 mW / Momentary On /	
	Strobe / S.O.S	
Runtime	2 h / 4 h 30 min / 60 h / - / -	
Beam Distance	246 m	
Water Resistance	IPX4	
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 18650 Li-ion battery	
Dimensions	168 mm × 26 mm × 40 mm / 6.61 × 1.02 × 1.57 in	
Weight	185 g / 6.53 oz (without battery)	





Beam Intensity Water Resistance

Dimensions

Impact Resistance

495,000 cd / 150,000 cd / 62,500 cd / - / -

162 mm × 38.4 mm × 27.5 mm / 6.38 × 1.51 × 1.08 in

1 × 21700 rechargeable battery

185 g / 6.52 oz (without battery)

1 m / 3.28 ft





Modes are selected by rotating magneti tail cap and One-Step-Strobe switch



OUTDOOR & EVERYDAY CARRY LIGHTS

Compact, convenient, and easy to operate, NEXTORCH's Outdoor & Everyday Carry Lights offer incredible illumination in a pocket-friendly design. These easy-to-operate lighting tools are ideal for both personal and professional use





High-Output Rechargeable EDC Pocket Flashlight















- Max output up to 3,000 lumens
 Single switch with 4 modes for simple operation
 Powered by 1 × 21700 rechargeable battery
 Hidden USB-C design
 LED battery level indicator

Modes	3,000 lm / 550 lm / 30 lm / Strobe	
Runtime	2 h 30 min / 4 h 15min / 65 h / -	
Beam Distance	210 m / 100 m / 25 m /-	
Beam Intensity	11,025 cd / 2,500 cd / 156 cd / -	
Water Resistance	IPX8 (2 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 21700 rechargeable battery	
Dimensions	153 mm × 30 mm × 27 mm / 6.02 × 1.18 × 1.06 in	
Weight	130 g / 4.58 oz (without battery)	



USB-C Direct Charge



High-capacity 21700 Battery



Battery Indicator



High-Performance Rechargeable EDC Flashlight




COMPATIBLE ACCESSORIES











Modes	1,600 lm / 340 lm / 28 lm / Strobe	
Runtime	2 h 30 min / 4 h 15 min / 43 h / -	
Beam Distance	205 m / 102 m / 25 m / -	
Beam Intensity	10,506 cd / 2,601 cd / 156 cd / -	
Water Resistance	IPX8 (2 m)	
Impact Resistance	2 m / 6.56 ft	
Battery	1 × 18650 rechargeable battery	
Dimensions	139 mm × 27 mm × 23 mm / 5.47 × 1.06 × 0.91 in	
Weight	94 g / 3.31 oz (without battery)	



USB-C Direct Charge



High-capacity 18650 Battery



Battery Indicator





















- * 405 nm UV LED light source highlights materials that are otherwise invisible to the naked eye
- * Durable aluminum construction is IPX7-rated, waterproof to a depth of one meter * Compact, lightweight design for easy portability and everyday use * Powered by 2 × AA batteries
- * Includes a lanyard for secure carry

Light Source	UV LED
Wavelength	405 nm
Power Output	500 mW
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	2 × AA batteries (included)
Dimensions	151 mm × 26 mm × 19 mm / 5.94 × 1.02 × 0.75 in
Weight	72 g / 2.53 oz (without batteries)



Detect Invisible Stains



Detect Counterfeits



IPX7 Waterproof


















- * Tail cap switch allows easy activation and mode selection
- * Compact, lightweight, and easily carried
- * Powered by 1 × AA battery (C1) / 2 × AA Batteries (C2)

and the same	toward for		
ncludes a	lanvard to	or secure	carry
iciades a	rangara re	Ji Secule	Culty

	C1	C2
Modes	140 lm / 20 lm	250 lm / 70 lm
Runtime	1 h / 13 h	1 h / 40 h
Beam Distance	86 m / 30 m	120 m / 60 m
Beam Intensity	1,849 cd / 225 cd	3,600 cd / 900 cd
Water Resistance	IPX7 (1 m)	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft	1 m / 3.28 ft
Battery	1 × AA battery (included)	2 × AA batteries (included)
Dimensions	102 mm × 19.2 mm × 26.4 mm	152 mm × 19.2 mm × 26.4 mm
Weight	50 g / 1.76 oz (without battery)	70 g / 2.47 oz (without batteries)



Compact & Portable



Tail Switch



IPX7 Waterproof

37

C1







300 Lumen Multifunction Rechargeable Keychain Light








- Ultra-compact multifunction keychain light, perfect for everyday carry
 Delivers a maximum output of 300 lumens with a 700 lm strobe
 Includes four LED light sources: White, red, blue, and ultraviolet (UV)
 Offers three white light brightness levels, strobe, and solid or flashing modes for red,
- * Features 2 independent mode switches
 * Powered by a built-in 180mAh rechargeable battery with a USB-C direct charging port

Modes	300 lm / 50 lm / 10 lm / Strobe
Runtime	1 h / 1 h 30 min / 9 h 15 min / -
Beam Distance	78 m / 30 m / 12 m / -
Beam Intensity	1,520 cd / 232 cd / 40 cd / -
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	Built-in 180 mAh rechargeable battery
Dimensions	73 mm × 16.5 mm × 16.5 mm / 2.87 × 0.65 × 0.65 in
Weight	17 g / 0.60 oz







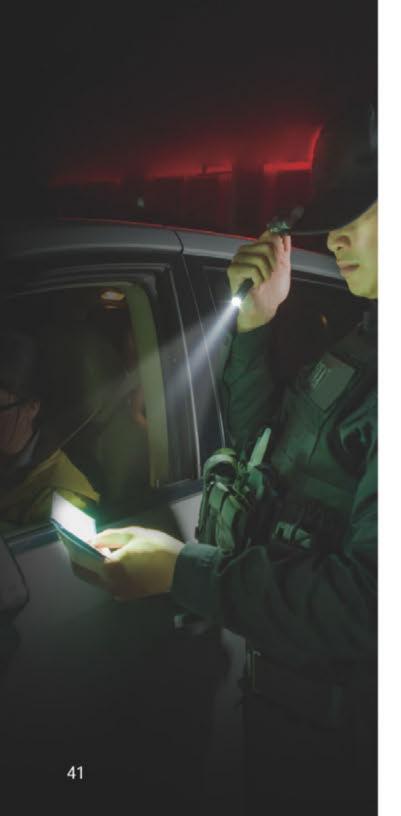



K33 UV



Ultraviolet Penlight









- * 365 nm deep UV light for optimal detection
- * Wood's Glass effectively fifters stray light and produces a fine UV light * UV light source up to 1,300 mW (Li-ion battery version)
- * Tail switch for momentary on and mode switching
- * Comes with 1 × 10880 rechargeable battery and is compatible with 2 × AAA batteries

Battery	One 10880 battery	Two AAA batteries
Modes	1,300 mW / 110 mW	700 mW / 110 mW
Runtime	1 h 30 min / 8 h 15 min	2 h / 7 h 45 min
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 10880 battery / 2 × AAA batteries	
Dimensions	142 mm × 16 mm × 13.2 mm / 5.59 × 0.63 × 0.52 in	
Weight	31 g / 1.09 oz (without batteries)	





High Performance LED Penlight















- * Max 850 lumen output (with Li-ion battery) * Pen sized for convenient carry and quick access
- * 4 modes available (low, medium, high, and strobe)
- * Power with with 1 Li-ion battery (included) or 2 regular AAA batteries
- * Stainless steel clip

Battery	One 10880 battery	Two AAA batteries
Modes	20 lm / 160 lm / 850 lm	20 lm / 110 lm / 400 lm
Runtime	12 h / 2 h 15 min / 1 h	12 h / 2 h 30 min / 1 h
Beam Distance	15 m / 40 m / 95 m	15 m / 33 m / 65 m
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 10880 battery / 2 × AAA batteries	
Dimensions	142 mm × 16 mm × 13.2 mm / 5.59 × 0.63 × 0.52 in	
Weight	35 g / 1.23 oz (without battery)	



Dr.K32

Dual Light Source Professional Medical Flashlight













- * Yellow and White light in one device
- * RA>95, high color rendering index for true tissue color rendition

Battery	One 10880 battery	Two AAA batteries
Color Temperature (CCT)	3,000K (Yellow) / 5,700K (White)	3,000K (Yellow) / 5,700K (White)
Modes	1 lm / 10 lm / 80 lm	1 lm / 10 lm / 70 lm
Runtime	80 h / 13 h / 1 h 45 min	80 h / 13 h / 1 h 30 min
Beam Distance	3 m / 15 m / 45 m	3 m / 15 m / 40 m
Light Source	Dual Light (Yellow & White)	
Color Rendering Index (RA)	≥95	
Photobiological Safety	RG0 (Yellow)	
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	1 × 10880 battery / 2 × AAA batteries	
Dimensions	149 mm × 16 mm × 13.2 mm / 5.90 × 0.56 × 0.52 in	
Weight	39 g / 1.37 oz (without battery)	



Dr.K3S

Medical Penlight















- * Featuring both yellow and white light sources
 * CRI ≥ 95 for accurate tissue color representation
- * Classified under Blue Light Hazard Class RG0 (Risk Exempt)

- * Weighs only 18.7 g * Single-use AAA Battery provides up to 55 hours of runtime

05 00 000K (Yellow) / 5,500K (White)
000K (Yellow) / 5,500K (White)
h
AAA (included)
5 mm × 14.3 mm / 4.13 × 0.56 in
.7 g / 0.66 oz (without battery)















COMPACT SIZE

WL22R 650 lm

WL22G 650 lm











WL23G 1,300 lm



650 lm





350 mW



WL30 400 lm









WL50 IR 860 lm





WL60














- Combines a high-intensity 700 lumen white light with a 5 mW green laser for precision targeting and illumination
 Remote switch design allows selective use of white light or laser functions
 White light modes include high and low output, with options for momentary, constant-on,
- and strobe

 * Attaches quickly and securely to all standard Picatinny rails without the need for tools

 * Powered by either one 18650 rechargeable battery (included) or two CR123A batteries
 for versatile power options

Modes	700 lm / 100 lm / Green Laser: <5 mW
Runtime	1 h 30 min / 12 h / 40 h
Beam Distance	320 m / 122 m / -
Beam Intensity	25,600 cd / 3,721 cd / -
Water Resistance	IPX7 (1 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 18650 rechargeable battery or 2 × CR123A
Dimensions	116 mm × 72 mm × 33 mm / 4.57 × 2.83 × 1.30 in
Weight	219 g / 7.73 oz (without battery)




Multifunction Pressure Switch




White Light and Green Laser



Independent Switches



















- Combines high-intensity white light and infrared (IR) illumination in a single unit
 Switchable to four modes: three brightness levels of white light and one IR illumination mode
 Patented head design rotates seamlessly to switch between white light and IR modes
 Remote switch allows both momentary on and constant on operation
 Attaches securely to all standard Picatinny rails without the need for tools
 Made of durable aerospace aluminum with a Type III hard-anodized finish

* Powered by either two CR123/	batteries (inc	cluded) or one 18650	rechargeable battery
--------------------------------	----------------	----------------------	----------------------

Battery	2 × CR123A	1 × 18650
Modes	860 lm / 330 lm / 140 lm / 400 mW	750 lm / 360 lm / 150 lm / 380 mW
Runtime	1 h 30 min / 2 h 30 min / 5 h 30 min / 4 h	3h15min/5h15min/5h15min/4h
Beam Distance	290 m	260 m
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	2 x CR123A (included) / 1 x 18650	
Dimensions	159 mm × 42 mm × 40 mm / 6.26 × 1.65	5 × 1.57 in
Weight	195 g / 6.87 oz (without batteries)	



Rotate to Select Light Sources



White Light and Infrared



Multifunction Pressure Switch













- * Combines high-intensity white light, a visible green laser, and an infrared (IR) laser in a single weapon light
 * Quickly attaches to all Picatinny or Glock rails

- * Ambidextrous Bi-paddle switch allows easy activation of white light
 * Windage and elevation adjustments allow precise alignment of both lasers

Light Source	White Light	Green Laser	IR Laser
Modes	400 lm	< 5 mW	< 5 mW
Runtime	1 h 30 min	10 h	24 h
Beam Distance	110 m	-	
Beam Intensity	3,025 cd		-
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	1 × CR123A (included)		
Dimensions	80 mm × 40 mm × 45 mm / 3.15 × 1.57 × 1.77 in		
Weight	115 g / 4.05 oz (without battery)		



Bi-Paddle White Light and Side Switch Buttons for Laser and IR



Three Light Sources



Battery Level Indicator

WL23G















- Provides 1,300 lumen high-intensity white light and a 5 mW green laser
 Patented mounting system quickly attaches to Picatinny and Glock rails
 Ambidextrous rocker switch allows easy activation of white light

-	1
	0
	1
01	1
	1
The state of the s	3
A STATE OF THE STA	- 10
	1

Light Source	White Light	Green Laser
Modes	1,300 lm	< 5 mW
Runtime	3 h 15 min	43 h
Beam Distance	180 m	_
Beam Intensity	8,100 cd	-
Water Resistance	IPX4	
Impact Resistance	1 m / 3.28 ft	
Battery	2 × CR123A (included) or 2 × 16340 rechargeable batteries	
Dimensions	82 mm × 36 mm × 49 mm / 3.23 × 1.42 × 1.93 in	
Weight	108 g / 3.80 oz (without batteries)	







1,300 Lumen Ultra Bright Weapon Light











- * Produces ultra bright 1,300 lumen white light with a 180 m beam distance * Ambidextrous rocker switch for momentary or constant on illumination
- Patented mounting system allows quick attachment to Picatinny or Glock rails
 Accepts optional remote switch for use on long guns
 Powered by 2 × CR123A batteries or 2 × 16340 rechargeable batteries

Light Source	Momentary on	Constant on
Modes	1,300 lm	1,300 lm
Runtime		3 h 15 min
Beam Distance	180 m	180 m
Beam Intensity	8,100 cd	8,100 cd
Water Resistance	IPX7 (1 m)	
Impact Resistance	1 m / 3.28 ft	
Battery	2 × CR123A batteries (included) or 2 × 16340 rechargeables	
Dimensions	82 mm × 36 mm × 39 mm / 3.23 × 1.42 × 1.54 in	
Weight	89 g / 3.13 oz (without batteries)	





WL21G/IR



2-in-1 Weapon Light / Laser Combo





and an IR laser (separate models)









- * Patented independent white light and laser switches
- * Ambidextrous rocker white light switch for momentary or constant on illumination * Attaches securely to all standard Picatinny and Glock rails

	WL21G	WL21IR	
Modes	650 lm / < 5 mW	350 mW / < 5 mW	
Runtime	1 h 30 min / 10 h	6 h / 30 h	
Beam Distance	130 m / -	-/-	
Beam Intensity	4,225 cd / -	-/-	
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	1 × 16340 rechargeable battery (included) or 1 × CR123A		
Dimensions	76 mm × 33 mm × 45 mm / 2.99 × 1.30 × 1.77 in		
Weight	108 g / 3.80 oz (without battery)		
















- * Produces a high-intensity 650 lumen white light
- * Patented ambidextrous rocker switch for momentary or constant on illumination
- * Attaches securely to all standard Picatinny and Glock rails
- * Powered by 1 x 16340 rechargeable battery (included) or 1 x CR123A battery



Modes	650 lm / Momentary on
Runtime	1 h 30 min / -
Beam Distance	130 m / 130 m
Beam Intensity	4,225 cd
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	1 × 16340 (included) / 1 × CR123A battery
Dimensions	76 mm × 33 mm × 33 mm / 2.99 × 1.30 × 1.30 in
Weight	76 g / 2.68 oz (without battery)




















- * Provides 650 lumen high-intensity white light and a 5 mW red or green laser (separate
- * Patented mounting system quickly attaches to Picatinny and Glock rails
 * Powered by a built-in 250 mAh rechargeable lithium-ion battery with a US8-C port



	WL22R	WL22G	
Modes	650 lm / < 5 mW / 650 lm	650 lm / < 5 mW / 650 lm	
Runtime	1 h / 6 h 30 min / -	1 h / 4 h 15 min / -	
Beam Distance	102 m/-/-	102 m / - / -	
Beam Intensity	2,601 cd / - / -	2,601 cd / - / -	
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	Built-in 250mAh rechargeable battery		
Dimensions	55 mm × 30 mm × 36 mm / 2.17 × 1.18 × 1.42 in		
Weight	74 g / 2.61 oz (with battery)		

















- Ultra-lightweight 48 g (1.69 oz) design is ideal for compact concealed carry handguns
 Provides 500 lumen high-intensity white light or 52 lm low-intensity illumination
 Attaches securely to all standard Picatinny and Glock rails

- * Powered by a built-in 250 mAh rechargeable lithium-ion battery with a USB-C port
- * Includes an LED battery level indicator for quick power monitoring



Modes	500 lm / 52 lm
Runtime	1 h 15 min / 2 h 30 min
Beam Distance	115 m / 35 m
Beam Intensity	3,306 cd / 306 cd
Water Resistance	IPX7 (1 m)
Impact Resistance	1 m / 3.28 ft
Battery	Built-in 250 mAh rechargeable battery
Dimensions	62 mm × 30 mm × 36 mm / 2.19 × 1.18 × 1.42 in
Weight	48 g / 1.69 oz (with battery)









T53 SET

3-in-1 Multi-Light Hunting Flashlight











- * The 360* dial rotates to switch between light sources
 * Patented multifunction DUO Switch, single switch for momentary on, constant on and
- * USB direct charge port
- * Fits with a scope mount and has a quick-insert remote control switch

- * RM85S Scope Mount * TS41-L Remote Switch * UC4 USB Charging Cable * 1 x 18650 Li-ion Battery

	White	Green	Red
Mades	760 lm / 45 lm / Strobe /	129 lm / 30 lm / Strobe /	109 lm / 23 lm / Strobe /
Modes	S.O.S. / Momentary On	S.O.S. / Momentary On	S.O.S. / Momentary On
Runtime	4h30min/31h/-/-/-	7h/34h/-/-/-	4h45min/25h/-/-/-
Beam Distance	220 m	160 m	122 m
Beam Intensity	12,100 cd	6,400 cd	3,721 cd

	Water Resistance	IPX7 (1 m)
f:	Impact Resistance	1 m / 3.28 ft
	Battery	1 × 18650 / 2 × CR123A
-	Dimensions	147 mm × 25.4 mm × 37 mm / 5.79 × 1 × 1.46
	Weight	155 g / 5.46 oz (without battery)





Switch Light Sources



USB Direct Charging System





INCLUDED ACCESSORIES

53

- * RM85S Scope Mount * TS41-L Remote Switch
- * UC4 USB Charging Cable * 1 × 21700 Rechargeable Battery

T7 MAX SET















- providing a beam distance of 1,100 meters * Ideal for long range use
- Provides four brightness levels, a strobe, and an S.O.S. function
 Multifunction DUO Switch allows easy activation
- * Powered by 1 × 18650 rechargeable battery (included) or 2 × CR123A batteries
- * Includes remote switch and scope mount

Modes	1,200 lm / 621 lm / 150 lm / 21 lm / Momentary On / Strobe / S.O.
Runtime	3 h / 4 h 30 min / 14 h / 80 h / - / - / -
Beam Distance	1,100 m / 755 m / 350 m / 142 m / - / - / -
Beam Intensity	302,500 cd / 142,506 cd / 30,625 cd / 5,041 cd / - / - / -
Water Resistance	IPX8 (2m)
Impact Resistance	1 m / 3.28 ft
Battery	1 × 21700 Lithium battery
Dimensions	172.4 mm × 27.5 mm × 60.8 mm / 6.79 × 1.08 × 2.39 in
Weight	225 g / 7.94 oz (without battery)





4800 mAh Large Capacity Battery



Multi-Tactical Switch

T5G SET v2.0







170 lumens, respectively












Patented design allows seamless switching between white and green light by rotating the head
 Both LED colors feature two brightness levels, a strobe mode, and an S.O.S. function
 Multifunction DUO Switch enables effortless activation and mode selection

	White	Green	
Modes	1,200 lm / 35 lm / momentary on / strobe / S.O.S.	170 lm / 27 lm / momentary on / strobe / S.O.S. (80 lm)	
Runtime	3h15min/35h/-/-/-	5h30min/37h/-/-/-	
Beam Distance	265 m / 46 m / - / - / -	230 m/63 m/-/-/-	
Beam Intensity	17,556 cd / 529 cd / - / - / -	13,225 od / 992 od / - / - / -	
Water Resistance	IPX7 (1 m)		
Impact Resistance	1 m / 3.28 ft		
Battery	1 × 18650 rechargeable battery (included) or 2 × CR123A		
Dimensions	145 mm × 40 mm × 25.4 mm / 5.71 × 1.57 × 1.00 in		
Weight	165 g / 5.82 oz (without battery)		



Dual Light



Change the Light Color



Multifunction Switch

TA41 SET

2,600 Lumen High Output Tactical Flashlight Set













- * High performance LED produces a maximum 2,600 lumen output
- Offers ultra bright, long range illumination capability in a compact, easily carried size
 Provides four brightness levels, a strobe, and an S.O.S. function
 Patented multifunction tail cap switch allows easy activation and mode selection

- Stainless steel bezel with nano-ceramic glass breakers for emergency egress and self-defense
 Powered by 1 × 21700 rechargeable battery (included)
- * Includes remote switch and scope mount for attachment to a long gun

Modes	2,600 lm / 700 lm / 200 lm / 28 lm / Momentary On / Strobe / S.O.S
Runtime	2 h 30 min / 3 h 45 min / 12 h / 71 h / - / - / -
Beam Distance	272 m / 140 m / 75 m / 29 m / - / - / -
Beam Intensity	18,496 cd / 4,900 cd / 1,406 cd / 210 cd / - / - / -
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	1 × 21700 rechargeable battery (included)
Dimensions	148 mm × 38 mm × 27 mm / 5.83 × 1.50 × 1.06 in
Weight	143 g / 5.04 oz (without battery)



Nano-Ceramic Glass Breaking Tips



Multifunction Switch

1,100 Meters Long Range



INCLUDED ACCESSORIES

INCLUDED ACCESSORIES

* UC4 USB Charging Cable * 1 × 21700 Rechargeable Battery

* UC4 USB Charging Cable * 1 x 18650 Rechargeable Battery










The included mount can be easily attached to MOLLE webbing



The light combined with the mounted headband can be attached to a variety of helmets

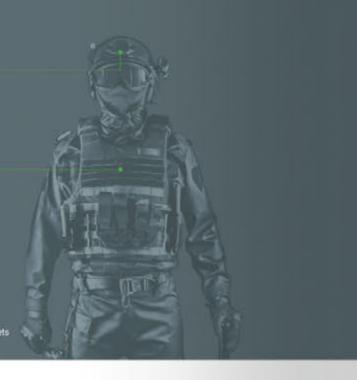







oStar













 Modular design allows for versatile use including a helmet light or headlamp
 Compatible with a variety of helmet styles for maximum adaptability
 Switchable to four modes: Three brightness levels and an S.O.S. mode for emergency signaling
* Powered by an 18650 rechargeable battery (included)

Modes	500 lm / 185 lm / 25 lm / S.O.S.
Runtime	6 h 30 min / 14 h / 60 h / -
Beam Distance	131m / 75m / 27m
Beam Intensity	4,290 cd / 1,406 cd / 182 cd / -
Water Resistance	IPX4
Impact Resistance	2 m / 6.56 ft
Battery	1 × 18650 rechargeable battery (included)
Dimensions	78 mm × 65 mm × 46 mm / 3.07 × 2.56 × 1.81 in
Weight	87 g / 3.06 oz (without battery)



Modular Design



Magnetic Design for Hands-Free Use



Single Switch for Four Modes




Multi-Light Source Tactical Helmet Light









* Aimable primary light source for easy adjustment

* Lightweight design

Light Source	White	Red	Green	IR	IFF Beacon IR Light
Modes	80 lm / 8 lm	1 lm	3 lm	940 nm	-
Runtime	1 h 30 min / 33 h	38 h	38 h	38 h	38 h
Beam Distance	12 m / 4 m	-	-		-
Beam Intensity	40 cd 4 cd	-	~	-	-
Water Resistance	IPX4				
Impact Resistance	2m / 6.56 ft				
Battery	One AA Alkaline Battery or AA 1.5V Li-ion Battery				
Dimensions	133 mm × 30 mm × 41 mm / 5.24 × 1.18 × 1.61 in				
Weight	50 g / 1.76 oz (without battery)				



Aimable Lighting



Easy to Operate



Lightweight and Compact

57 58

White / Red / Green / IR / IFF





SunLike LED







* High performance white and red LEDs produce a maximum output of 450 lm
* Innovative flip-up design powers the light on and provides stepless dimming from

Switchable to five modes: Spotlight, high and low floodlight, red light, and red flashing
 Built-in 1100 mAh rechargeable battery with USB-C direct charging port

Light Source	Spotlight	Floodlight	Red Light
Modes	20 lm - 450 lm	105 lm / 14 lm	14 lm / 14 lm
Runtime	21 h - 2 h 30 min	2 h 45 min / 15 h	15 h / 25 h
Beam Distance	16 m - 80 m	13 m / 4 m	
Beam Intensity	64 cd - 1,600 cd	40 cd / 5 cd	-
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	Built-in 1100 mAh rechargeable battery		
Dimensions	67 mm × 39 mm × 32 mm / 2.64 × 1.54 × 1.26 in		
Weight	70 g / 2.47 oz (without battery)		



Flip-up Head Activates and Dims Light



450 Lumen Stepless Dimming



High Color Rendering Index (CRI: 95)









maxStar













- * High performance LED produces a maximum output of 1,200 lumens for a 200 meter beam distance * Switchable to three brightness levels

- Rotating magnetic dial switch on lamp head allows easy one-handed mode selection
 Powered by a built-in 18650 rechargeable battery with USB-C direct charging port

Modes 1,200 lm / 160 lm / 20 lm			
Runtime	4 h 30 min / 8 h / 40 h		
Beam Distance	200 m / 72 m / 25 m		
Beam Intensity	10,000 cd / 1,296 cd / 156 cd		
Water Resistance	IPX4		
Impact Resistance	1 m / 3.28 ft		
Battery	Built-in 18650 rechargeable battery		
Dimensions	73 mm × 33 mm × 60 mm / 2.87 × 1.30 × 2.36 in		
Weight	147 g / 5.19 oz (with battery)		



Detachable Design for Handheld Use



Pivoting Design Adjusts through 180° Range



USB-C Direct Charging




Compatible with Two Types of Batteries



myStar R's 3,000 mAh Li-ion rechargeable



myStar R/myStar R AA













- * Switchable to four modes: Three brightness levels and S.O.S.
 * Head tilts 60 degrees vertically
 *Y-shaped headband harness ensures all-day comfort

Model	myStar R	myStar R AA
Battery	3000 mAh rechargeable battery	3 x AA battery pack
Modes	760 lm / 245 lm / 28 lm / S.O.S.	600 lm / 240 lm / 35 lm / S.O.S.
Runtime	4 h 45 min / 8 h 15 min / 81 h / -	4 h 30 min / 7 h / 55 h / -
Beam Distance	220 m / 124 m / 42 m / -	180 m / 118 m / 45 m / -
Beam Intensity	12,100 cd / 3,844 cd / 441 cd / -	8,100 cd / 3,481 cd / 506 cd / -
Water Resistance	IPX4	
Impact Resistance	1 m / 3.28 ft	
Dimensions		44 mm / 2.91 × 1.57 × 1.73 in n × 82 mm / 2.99 × 1.12 × 3.23 in
Weight	120 g / 4.23 oz (without batte	ry)











myStar _{V2.0}

















- * NEXTORCH Patented Fresnel Lens Focusing Technology allows progressive one-handed adjustment from flood light to spot

 * Switchable to four modes: Three brightness levels and S.O.S.

 * Powered by a built-in rechargeable lithium-polymer battery pack with a Micro USB
- charging port
 * Y-shaped headband harness ensures all-day comfort

Modes	760 lm / 245 lm / 28 lm / S.O.S.
Runtime	4 h 45 min / 8 h 15 min / 81 h /
Beam Distance	220 m / 124 m / 42 m / -
Beam Intensity	12,100 cd / 3,844 cd / 441 cd /
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	Built-in 3000 mAh rechargeable battery
Dimensions	Light Body: 74 mm × 40 mm × 44 mm / 2.91 × 1.57 × 1.73 in Battery Pack: 76 mm × 28.5 mm × 82 mm / 2.99 × 1.12 × 3.23 in
Weight	175 g / 6.17 oz (with battery pack)



Focus Adjustable Beam





Comfortable Y-Shaped Harness

trekStar

Ultra Bright Multifunction Headlamp















- * Lightweight headlamp provides both white light and red light illumination to preserve your night vision

 * Switchable to five modes: Three white light brightness levels, red light, and S.O.S.

 * Head tilts 100 degrees vertically

 * Powered by 3 × AAA batteries (included)

 * Light module can be detached and used separately

Modes	220 lm / 125 lm / 9 lm / Red (2 lm) / S.O.S.
Runtime 2 h 30 min / 9 h / 98 h / 92 h / -	
Beam Distance 73 m	
Beam Intensity	1,332 cd
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	3 × AAA batteries (included)
Dimensions	55 mm × 38 mm × 32 mm / 2.17 × 1.50 × 1.26 in
Weight	83 g / 2.92 oz (with batteries)

ecoStar

Lightweight Headlamp and Clip Light



Detachable Lamp

INCLUDES CLIP-STYLE MOUNT











- * Lightweight headlamp provides both white light and red light illumination to preserve your night vision

 * Switchable to four modes: Two white light brightness levels, red light, and S.O.S.

 * Head tilts 180 degrees vertically

 * Includes multifunction clip mount for attachment to caps, pockets, backpacks, and

- MOLLE webbing
- * Powered by 2 x AAA batteries (included)

Modes	48 lm / 6 lm / Red (5 lm) / S.O.S.			
Runtime	8 h / 49 h / 111 h / -			
Beam Distance	16 m			
Beam Intensity	64 cd			
Water Resistance	IPX4			
Impact Resistance	1 m / 3.28 ft			
Battery	2 × AAA batteries (included)			
Dimensions	54 mm × 42 mm × 21 mm / 2.13 × 1.65 × 0.83 in			
Weight	71 g / 2.50 oz (with batteries)			







ND30 & ND30B TACTICAL DISTRACTION DEVICES

The NEXTORCH tactical distraction device represents the peak evolution of less lethal NFDD Technology, combining intense light and sound generation in a non-pyrotechnic package. The ND30B expands NFDD deployment options beyond traditional flashbangs.

This innovative system combines 11,000 lumens of disorienting strobe with 130dB sound output, providing law enforcement professionals a rechargeable alternative to traditional flashbangs.





Audio and Visual Distraction 11,000 lm 360° ultra bright Strobe & 130 dB audio output



Traditional Flashbang Design
Ideal for building muscle memory



Rotate to select different modes and delays, ensuring seamless adaptability to any mission or environment



IPX 7, 1 m Waterproof

The IPX7 water resistance rating means you can train in any weather




Impact Resistant

Durable construction is designed to handle the bumps and drops of active deployment



USB-C Direct Charge

Powered by built-in rechargeable battery with USB-C direct charging

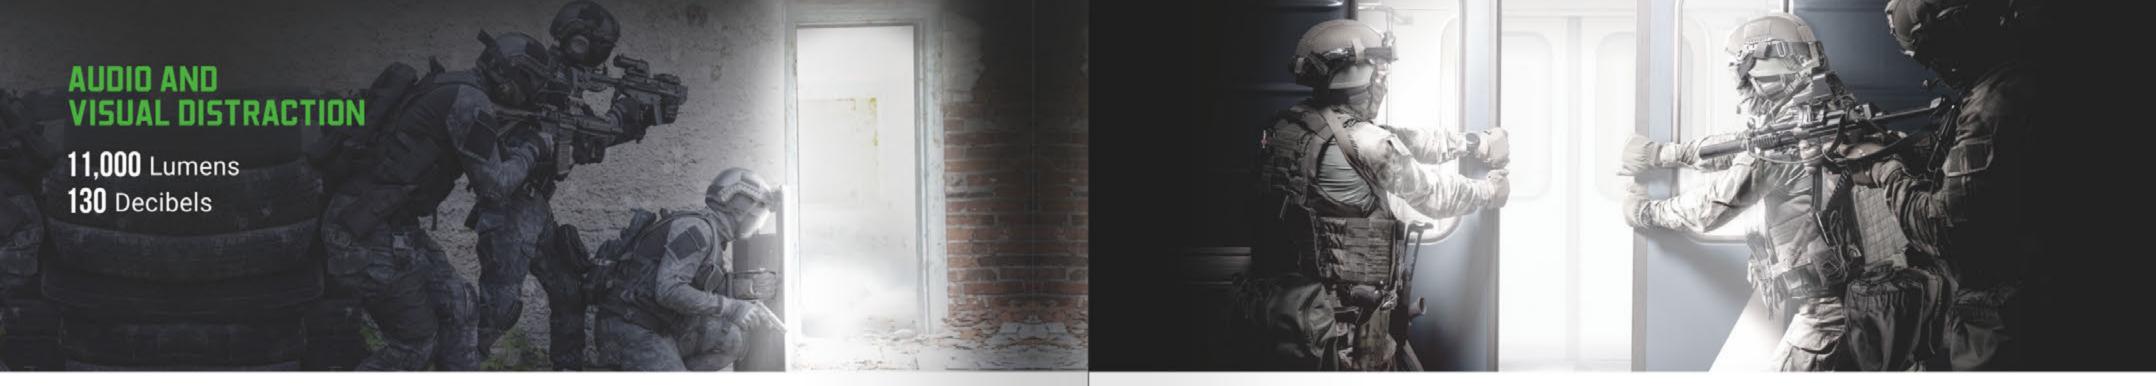

ND30B/ND30 MARRIEM GUTPUT 11,000 (3) 250KB WITEKBITY 130 dB (4,400 Times







Impact Resistant	3 m / 9.84 ft	
Shape	Proprietary Reinforced Design	
Dimensions	127 mm (Length) × 47 mm (Diameter) 5.00 × 1.85 in	

The ND30B is primarily designed for training purposes. Its rubberized exterior enhances durability, but necessitates the use of a custom holster (included), which changes the loadout compared to a traditional flashbang.

ND30	
Impact Resistant	2 m / 6.56 ft
Shape	Same Size and Shape as Traditional Flashbangs
Dimensions	128 mm (Length) × 40 mm (Diameter) 5.04 × 1.57 in

The ND30 is primarily designed for active deployment scenarios by SWAT and similar tactical operators, because it closely replicates the design and deployment of a traditional flashbang.

ND30B & ND30 SPECIFICATIONS					
Mode 1	1 Time Strobe and Sound 4,400 Times	Light Output	11,000 lm	Water Resistance	IPX7, 1 m
Mode 2	2 Times Strobe and Sound 300 Times	Beam Intensity	1,225 cd	Weight	265 g / 9.34 oz (With Battery)
Mode 3	9 Times Strobe and Sound 80 Times	Sound Intensity	130 dB	Material	Light Source: 18 LEDs Aluminum Alloy
Mode 4	12s Continuous 65 Times	Beam Distance	70 m	Battery	Built-in 18650




















Multiple Installation Options













- High-intensity light for direct mounting on ballistic shields
 Remote switch design with Strobe function
 Multiple installation methods for ultimate flexibility
 Powered by one 21700 rechargeable battery with USB-C direct charging
- * Battery status indicators * Enhanced durability ideal for heavier ballistic shields

Modes	Constant On / Strobe
Runtime	2 h 15 min / 6 h
Beam Distance	250 m / -
Beam Intensity	15,625 cd / -
Water Resistance	IPX8, 2 m
Impact Resistance	1 m / 3.28 ft
Battery.	1 × 21700 rechargeable battery
Dimensions	170 mm × 68 mm × 42 mm / 6.69 × 2.68 × 1.65 in
Weight	405 g / 14.29 oz (without battery)



Remote Switch Design

Variable Frequency Strobe



Battery Status Indicators







Multiple Installation Options

4,000 Lumen Focusable Shield Light














- Multiple mounting options
 Powered by 2 × 21700 rechargeable batteries with USB-C direct charging
 LED power indicator

Modes	4,000 lm / Strobe	
Runtime	2 h 45 min / 3 h 45 min	
Beam Distance	550 m / -	
Beam Intensity	76,800 cd /	
Water Resistance	IPX4	
Impact Resistance	1 m / 3.28 ft	
Battery	2 × 21700 rechargeable battery	
Dimensions	185 mm × 85 mm × 55.6 mm / 7.28 × 3.34 × 2.19 in	
Weight	433 g / 15.27 oz (without battery)	



Individually Focusable Beams



Universal Mounting



LED Power Indicators

72







JT51C

UT51 UT51L







UT31







UT2





UT10C





UL12


70 lm


UT SERIES MULTIFUNCTION SAFETY LIGHTS

NEXTORCH UT Series Safety Lights are designed to enhance visibility and ensure safety in a variety of situations, including emergencies, tactical operations, and outdoor activities.


These lightweight and durable devices feature multiple lighting modes to adapt to diverse needs.

The series includes safety slap bracelets, multifunction signal lights, emergency clip lights, and multifunction warning lights, providing reliable solutions for any scenario.

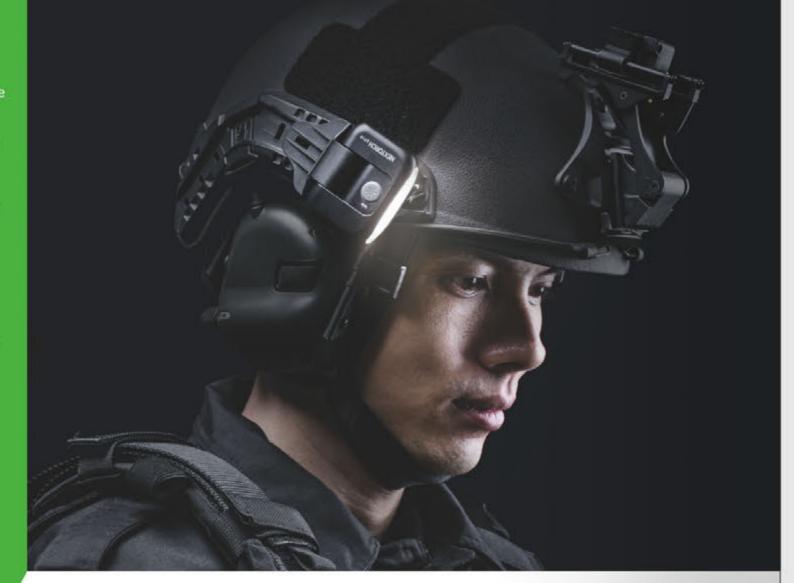

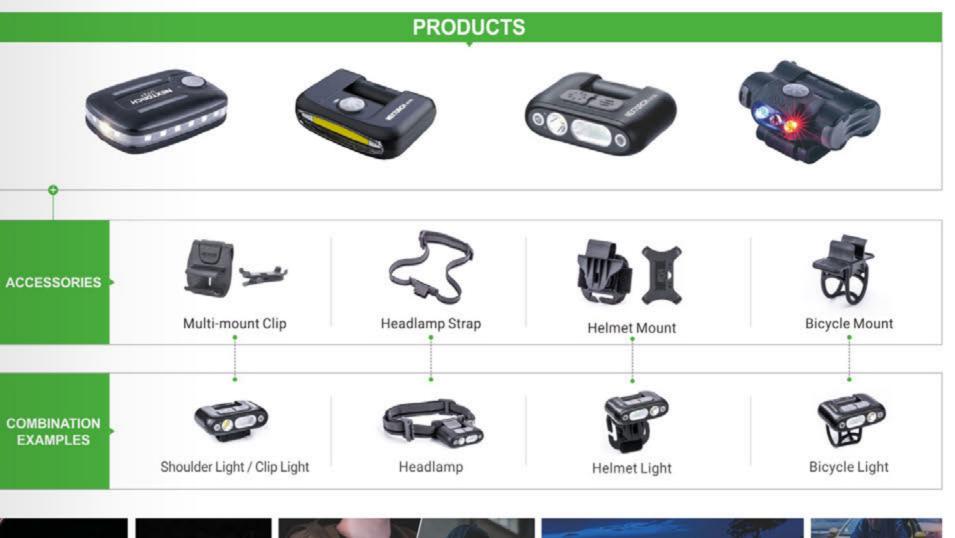












Bike Light

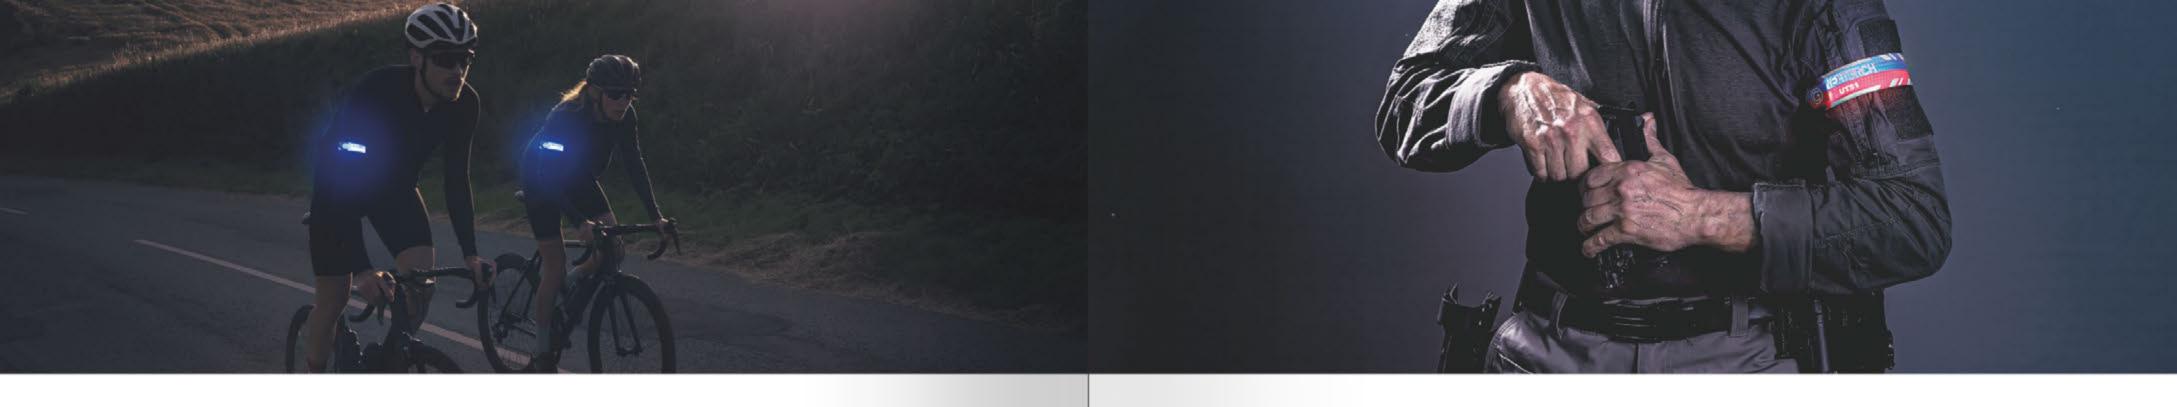





UT51C











- * Hands-free slap bracelet design easily wraps around wrists, cylindrical objects, or other

- * Green, blue, and orange LED light sources provide bright, eye-catching colors

 * One-click mode selection offers 7 lighting modes to suit a variety of needs

 * 360* light ensures full visibility from all directions

 * USB-C charging port enables fast recharging, fully charged in just 1.5 hours, with up to
 33 hours of battery life

lodes	Flash	Constant On	
reen Light	33 h	17 h	
ule Light	2 h 45 min	1 h 15 min	
range Light	5 h 30 min	2 h 30 min	
radient Light	3 h 30 min	_	
npact Resistance	2 m / 6.56 ft		
attery	Built-in 150 mAh Lithium-ion Battery		
imensions	458 mm × 38 mm × 10 mm / 18.03 x 1.5 x 0.39 in		
leight	54g / 1.9 oz (with battery)		



Three-color Light Source



Slap Bracelet Design



360° Visibility






UT51/UT51L









- * Offers 5 lighting modes: Red flashing, blue flashing, red & blue flashing, steady red light, and steady blue light

 * Compact and lightweight for maximum portability and convenience

 * USB-C direct charging port for fast and easy recharging

- * Equipped with an LED battery indicator for instant power status updates

Modes	UT51		UT51L	
	Constant On	Flash	Constant On	Flash
Red & Blue Flash	-	12 h		10 h
Red Light	6h	12 h	6 h	12 h
Blue Light	2 h 30 min	5h	1 h 30 min	3 h
Impact Resistance	2 m / 6.56 ft			
Battery	Built-in 150 mAh Li-ion battery			
Dimensions	348 mm × 36 mm × 10 mm		458 mm × 38 n	nm × 10 mm
Weight	38 g/1.34 oz (with battery)		54 g/1.90 oz (v	with battery)



360 Degree Visibility



Slap Bracelet Design



USB-C Direct Charge

78





UT41

Multifunction Rechargeable Safety Light









Water Resistance IPX8 2 m





- * Includes six LED light sources: Green, yellow, blue, red, white, and infrared (IR).

 * Offers 13 beacon and flashing operational modes.

 * Features a USB-C direct charging port for convenient recharging.

 * Equipped with an LED battery level indicator for quick power monitoring.

 * Comes with hardware for mounting on helmets, MOLLE webbing, and other surfaces.

Light Source	White / Red / Blue LEDs
Modes	Red & Blue Flash / Red 3 lm / Blue 2 lm / Yellow 9 lm / Green 12 lm / White 20 lm / IR 850 nm
Runtime	56 h / 18 h / 16 h / 20 h / 18 h / 12 h / 13 h
Water Resistance	IPX8 (2 m)
Impact Resistance	2 m / 6.56 ft
Battery	500 mAh Li-ion battery
Dimensions	62.5 mm × 27 mm × 25 mm / 2.46 × 1.06 × 0.98 in
Weight	29 g / 1.05 oz (with battery)



6 Light Sources & 13 Modes



MOLLE Mount



Helmet Mount

UT31

Smart-Sensing Clip Light / Safety Light













- Combines hands-free white light illumination with a high-visibility colored safety light.
 Equipped with three LED light sources: white, red, and blue.

- Colored light modes include constant red, flashing red, and flashing red and blue.
 Hands-free gesture sensor alliows effortless control of lighting modes.
 USB-C direct charging port provides convenient and fast recharging.
 Multipurpose clip mount attaches securely to caps, pockets, backpacks, and MOLLE webbing.

Modes	High (White)	Low (White)	Red	Red Flash	Red-Blue Flash
modes	220 lm	28 lm	4 lm	4 lm	-
Runtime	6 h	16 h	21 h	42 h	80 h
Beam Distance	53 m	19 m	-	-	-
Beam Intensity	702 cd	90 cd	-	-	-
Water Resistance		IPX4			
Impact Resistance		1 m / 3.28 ft			
Battery	Built-in 640 mAh rechargeable battery with USB-C direct charging port				
Dimensions	61 mm × 53 mm × 30 mm / 2.40 × 2.09 × 1.18 in				
Weight	50 g / 1.76 oz (with battery)				

UT30

Smart-Sensing Multifunction Light



Motion Activated Controls

INCLUDED ACCESSORIES











- Features dual white and red LED light sources for versatile illumination.
 Offers four white light brightness levels and three beam patterns to suit various needs.
 Red light modes include constant on and flashing safety mode.
 Hands-free gesture sensor allows easy and convenient control.

- Compatible with multiple mounting platforms for use as a headlamp, bike light, or helmet light.
 Multipurpose clip mount attaches securely to caps, pockets, backpacks, and MOLLE webbing.

Light Source	Dual White and Red LEDs
Modes	320 lm / 220 lm / 140 lm / 4 lm
Runtime	3 h 45 min / 7 h / 7 h 30 min / 21 h / -
Beam Distance	55 m / 53 m / 15 m / -
Beam Intensity	756 m / 702 cd / 56 cd / -
Water Resistance	IPX4
Impact Resistance	1 m / 3.28 ft
Battery	Built-in 640 mAh rechargeable battery
Dimensions	61 mm × 47 mm × 19 mm / 2.40 × 1.85 × 0.75 in
Weight	41 g / 1.44 oz (with battery)







ACCESSORIES INCLUDED







Mount

ACCESSORY INCLUDED





UT22 Multifunction Rechargeable Safety Light











with white light for added clarity. * Equipped with 22 blue and red LEDs alongside a powerful white illumination LED.

* Orientation sensor automatically adjusts between horizontal and vertical LED arrays

* Hands-free operation enabled by a gesture sensor for seamless control.

Light Source	White LED and 22 blue-red LEDs			
Modes	Red-blue Flash (horizontal)	Red-blue Flash (vertical)	Red-blue Flash (all directions)	White Light
	-	-	-	11 lm
Runtime	20 h	22 h	10 h	25 h
Water Resistance	IPX4			
Impact Resistance	2 m / 6.56 ft			
Battery	Built-in 640 mAh rechargeable battery			
Dimensions	72.3 mm × 50 mm × 40 mm / 2.85 × 1.97 × 1.57 in			
Weight	92.3 g / 3.25 oz (with battery)			













- * Provides 360" illumination with 22 blue and red LEDs for full visibility in all directions.
- * Equipped with a 360° rotating shoulder clip for hands-free convenience.
- * Built to endure tough conditions with 2-meter impact resistance and IPX4 water resistance.
- * Powered by a long-lasting 640 mAh built-in Li-ion battery, rechargeable via a USB-C port
- * Features a double-tap function for quick, temporary ON/OFF control.

Light Source	White / Red / Blue LEDs			
Modes	Red-blue Flash (horizontal)	Red-blue Flash (vertical)	Red-blue Flash (all directions)	White Light
	-	-	-	11 lm
Runtime	20 h	22 h	10 h	25 h
Water Resistance	IPX4	IPX4		
Impact Resistance	2 m / 6.56 ft	2 m / 6.56 ft		
Battery	Built-in 640 mAh rechargeable battery			
Dimensions	72.4 mm × 50 mm × 38.4 mm / 2.85 × 1.97v1.51 in			
Weight	85 g / 3 oz (with battery)			

UT11C

Dual Function Rechargeable Safety Light

- * Combines white light illumination with red and blue flashing signal lights.

 * COB (Chip-on-Board) light source delivers soft, wide-
- angle flood lighting.
- * Adjustable head tilts 180 degrees vertically.
- * Equipped with a USB-C direct charging port for convenient
- * Features an LED battery level indicator for quick power status updates.



Cap Clip

Modes	Red-Blue Flash: -	High (White): 170 lm	Low (White 20 lm
Runtime	81 h	2 h	11 h
Beam Distance	ш	19 m	7 m
Beam Intensity	2	90 cd	12 cd
Water Resistance	IPX4		

Impact Resistance	1 m / 3.28 ft
Battery	Built-in rechargeable battery with USB-C direct charging port
Dimensions	60 mm × 46 mm × 18 mm / 2.36 × 1.81 × 0.71 in
Weight	48 g / 1.69 oz (with battery)

UT10C

Multifunction Rechargeable Light

- * Compact and lightweight design for easy portability.
- * Features dual white and red LED light sources for versatile illumination.
- * Offers two brightness levels for white light.
- * Red light modes include constant on and flashing safety mode.
- * Compatible with various mounting platforms, allowing use as a clip-on light, headlamp, bike light, or helmet light.





Runtime

Distance Beam Intensity

Water

Resistance



White: 170 lm / 20 lm

2h/11h

19 m / 7 m

90 cd / 12 cd

IPX4



18 h/-

-/-

-/-





Red: 5 lm / Flash 1 m / 3.28 ft Resistance Built-in 640 mAh rechargeable 60 mm × 46 mm × 18 mm / 2.36 × 1.81 × 0.71 in 39 g / 1.37 oz (with battery)

Multifunction Clip Light / Safety Light

- * High-visibility colored safety light and white light illumination
- * Clip-on design allows easy attachment to caps, pockets, backpacks, and MOLLE webbing
- * The pivoting design allows a 360 degree adjustment
- * Powered by 2 × AAA batteries (included)



Light Source	White, Red, and Blue LEDs	Impact Resistance	1 m / 3.28 ft
Modes	17 lm (white) / 3 lm (red) / red-blue flash	Resistance	
Runtime	7 h 30 min / 18 h / 62 h	Battery	2 × AAA batteries (included)
Beam Distance	13 m / 6 m / -	Dimensions	32 mm × 48 mm × 54 mm / 1.26 × 1.89 × 2.13 in
Beam Intensity	42 cd / 9 cd / -		
Water Resistance	IPX4	Weight	49 g / 1.73 oz (with batteries)

Multipurpose Clip Light

- * Equipped with 3 high-performance LEDs, delivering a maximum output of 70 lumens.
- * Features a versatile clip mount that attaches to caps, pockets,
- straps, and MOLLE webbing for hands-free convenience.

 * Offers 180-degree adjustability with easy flip-and-hold functionality.
- * Ultra-lightweight design, weighing just 49.5 grams (including batteries).
- * Compatible with interchangeable clips, including clips designed for ECO STAR TREK STAR, UT10, and other NEXTORCH clip lights.



70 lm / 7 lm / S.O.S.	Impact Resistance	1 m / 3.28 ft
4 h 30 min / 44 h / -	Rattery	2 × AAA (included)
10	Dintery	2 ~ Non (illiciducu)
16 m	Dimensions	32 mm × 48 mm × 54 mm /
81 cd	Differsions	1.26 × 1.89 × 2.13 in
IPX4	Weight	49.5 g / 1.75 oz (with batteries)
	4 h 30 min / 44 h / - 18 m 81 cd	4 h 30 min / 44 h / – Battery 18 m 81 cd Resistance Battery Dimensions



GLO-TOOB°

The GLO-TOOB is a personal signal light conceived by Dave Kessel and Lewton Levy in 1996 after a night scuba dive in South Africa. Disappointed with the product they were using at the time, which was neither reliable nor environmentally friendly, they decided to design a signal light specifically for the scuba diving market. Kessel approached NEXTORCH with the idea and after several years of intensive research, development and real-world testing, the GLO-TOOB was born and released in 2002. This revolutionary personal signal light was patented and set new standards not only in scuba diving, but also gained a loyal following among military, law enforcement and adventure sports users.



GT-AAA Aurora Signal Light

- * Features red, green, and blue LED lights
- * Seven modes: Three constant-on and four flashing options * 360* Visibility
- * IPX8 waterproof
- * Designed for use with the GLO-TOOB Tactical Kit (GTK) for mounting to Ops-Core helmets, MOLLE webbing, and other surfaces
- * Powered by 1 x AAA battery (included)

Light Source	Red, Green, and Blue LED		
Modes	Constant on Flashing		
Modes	Red / Green / Blue	Red / Green / Blue / Red-Blue	
Runtime	14h/17h/17h	32 h/35 h/35 h/48 h	
Submersible	IPX8		
Battery	1 × AAA battery (in	cluded)	
Dimensions	77.4 mm × 19 mm / 3.05 × 0.75 in		
Weight	29 g / 1.02 oz (without battery)		





Multiple Colored LEDs

Compatible with **NEXTORCH GTK Mount**



GTK (GLO-TOOB TACTICAL KIT)

- * Specifically designed to mount to the ARC rails on Ops-Core helmets
- * Base plate allows quick, secure attachment to MOLLE
- * Includes velcro mounting option
- * Easily attaches and detaches in seconds

Dimensions	68.4 mm × 50.3 mm × 27.9 mm	
Ring Size	18.8 mm - 19.8 mm	
Colors		
Weight	27 g / 0.95 oz	
Material	PA + GF	





Easily Attaches to Ops-Core ARC Rails



Attaches to MOLLE Webbing

GT-AAA Number of Modes $1 \times AAA$ LED Color Choices 4-15 h Runtime Depth Rating 60 m / 197 ft Dimensions 76 mm × 19 mm / 2.99 × 0.75 in 34 g / 1.2 oz (with battery)








480 **ACCESSORIES** 85

BATTERIES

USB-C Rechargeable Batteries







16340 Li-ion Battery









18650 Li-ion Battery







Battery	10880 Li-ion Battery	
Capacity	650 mAh	
Voltage	3.7 V	
Charge Cycles	≥ 500 times	
Working Temperature	- 20-60°CII	
Weight	20 g	
Dimensions	Diameter 10.5 mm Height 87.5 mm	

Rechargeable Battery (requires external charger)



21700 Li-ion Battery 4800 mAh 3.6 V ≥ 500 times Working -20-60°C Temperature Diameter 21.5 mm Height 76.3 mm



Battery	18650 Li-ion Battery
Capacity	2600 mAh
Voltage	3.6 V
Charge Cycles	≥ 500 times
Working Temperature	- 20-60℃
Weight	52 g
Dimensions	Diameter 18.8 mm Height 70 mm

Charger



DC20 UNIVERSAL BATTERY CHARGER * Batteries are not included

The NEXTORCH DC20 Dual-Slot Smart Battery Charger is a versatile and reliable charging solution for a wide range of batteries, with an easy-to-read LCD, and support for various battery sizes. DC20 also includes 0V activation to restore over-discharged batteries.

Lighting Accessories



V65 X-CARRY Quick-Draw Flashlight Holster

The V65 X-Carry is a versatile, lightweight holster designed for quickdraw access and 360° rotatable positioning. It can be locked into 16 different angles and features a modular quick-detach system for rapid switching between flashlights and the bottom pass-through enables hands-free illumination. Compatible with flashlight barrel diameters of 27-30 mm, it fits MOLLE webbing or belts under 50mm.



V15 Tactical Belt Bag

The V15 tactical belt bag is made from 1680D ballistic nylon, it has high tensile strength, great abrasion resistance and it's water-repellent. Outer dimensions are 205x75x130mm, and it has a large interior compartment that allows it to be easily configured to organize your gear. It can be used on a belt, tactical vest, or tactical bag and it has external MOLLE webbing for attaching accessory pouches.



V55 / V55L X-Carry Quick-Draw Tactical Flashlight Holster

The NEXTORCH V55 and V55L X-Carry Holsters are built from glassreinforced nylon, and are compatible with belts from 38-50mm in width. The V55 fits flashlights with head diameters from 21-31mm and bodies from 19-23mm. The V55L fits flashlights with head diameters of 27-39mm and body diameters of 24-28mm. The X-Carry belt attachment system accommodates most modern duty belts 2' and under, and the pass-through bottom enables hands-free illumination.



V10 Nylon Flashlight Holder

V10 is constructed with durable 1000D Cordura® nylon, it's extremely robust and quick-drying, it fits belts up to 80 mm (3.15 in) wide and is compatible with NEXTORCH P80, P60, TA5, TA40, and T7.



V35 X-Carry Modular Tactical Quick Draw Holster

The V35 X-Carry holster delivers lightning-fast deployment with a streamlined design and true 360° rotation, the belt compatibility ranges from 38-50mm, providing rock-solid fit on most duty belts while maintaining full MOLLE integration capabilities. Purpose-built for the NEXTORCH TA30C and TA20 with FR-1 Ring.



V26 Nylon Multi-Purpose Holster

The V26 X-Carry holster is made from high-strength nylon and fiberglass-reinforced materials and it's dimensions are 186 × 72 × 90 mm, and it fits belts or MOLLE webbing from 38-50mm, The V26 X-Carry offers a durable and versatile solution for securely carrying your TA31, ND308, or other flashlight



V51 Quick-Draw Flashlight Holster

The NEXTORCH V51 brings enhanced deployment capability to your duty light setup through its advanced Quick-Draw system. The 16-position locking system provides 360-degree rotation capability, and its mounting system accommodates both duty belts up to 55mm and MOLLE platforms, supporting both patrol and tactical operators. Compatible with lights from 25-32mm in diameter.



FR-1 / FR-1 MAX Tactical Flashlight Finger Ring

This mission-critical finger ring system delivers enhanced retention and instant light manipulation while providing secondary CQB striking capability. Purpose-built for duty use, this tactical finger ring transforms your TA20/TA30C into an integrated defensive platform with superior grip and split-second deployment features, FR-1 has a 27mm diameter finger guide while FR-1 MAX is 32mm.



Traffic Wand

The NEXTORCH Traffic Wand transforms your standard-issue duty light into a tool that cuts through the darkness and chaos of roadside operations. It's made of military-grade PC material, compatible with 33-38 mm light head diameters and fits NEXTORCH P86, P84, P83, TA30C Max, etc.



FR-2 Tactical Flashlight Finger Ring

Maximize your tactical advantage with the ultra-lightweight FR-2 tactical finger ring, it's made of mil-spec steel and nylon composite, and is compatible with 25-27mm body diameter lights. This combat-proven finger ring system delivers instant light manipulation while also providing a secondary CQB striking option.



HM30 Multi-Purpose Handle Mount

The NEXTORCH Saint Torch series handle is a great addition to your search and rescue gear. The handle offers an ergonomic grip, making it easier to maneuver and control your Saint Torch lights, ensuring you are well-equipped for any mission or outdoor adventure.



HM2 Universal Flashlight Helmet Mount

The NEXTORCH HM2 is a versatile holder designed with a double-sided 3M adhesive strip for the secure and flexible mounting of flashlights on helmets and other smooth surfaces. It's 360 degrees rotatable and fits lights with body diameters of 22-30 mm.



TS41-L Tactical Remote Switch

Engineered to meet the original factory specifications, this replacement switch delivers the same tactile response and performance you've come to trust in the field, it maintains the durability and weather resistance that made the T5G and T7 MAX your go-to choices, and is also compatible with the WL13 and WL23 for long-gun use.



HM3 Headlamp Helmet Clip

The NEXTOCH HM3 clamp is designed to hold the headlamp firmly and securely on the helmet. The sturdy material is very durable, it fits all helmets with a thickness of less than 6 mm.



RM87 Magnetic Flashlight Tactical Mount

The RM87 is a sturdy and reliable solution for attaching flashlights to various surfaces, it features a strong magnet that maintains its hold even at elevated temperatures, ensuring stability in adverse conditions. It is constructed from aerospace aluminum alloy, compatible with flashlight body diameters from 23 to 26.5 mm.



RM25S Picatinny Rail Flashlight Mount

The RM25S flashlight mount secures your flashlight to any standard 20mm Picatinny or Weaver rail with zero wiggle and zero fuss, and is compatible with flashlight body diameters of 22 – 26 mm.



RM85S Quick Release Flashlight Mount

Built for the demands of tactical operations, the RM85S features a universal fit system accommodating lights from 23-28mm in diameter. The lever lock system ensures rapid transitions between mounting locations while ensuring your light stays exactly where you need it during dynamic movement



QUICKER DUTY SERIES

0

Solid Locking



BATON FLASHLIGHT SERIES



WALKER CONCEALABLE SERIES



LEATHER WALKER CONCEALABLE BATON



NEX LOCK SYSTEM

The NEX LOCK System, patented and developed by NEXTORCH, ensures reliable, secure, and efficient performance for all NEX Batons. Designed to keep the baton securely extended, it prevents accidental retraction during use and withstands repeated impacts, providing the strength and durability required in demanding situations. Mission-proven in the field, the NEX LOCK mechanism gives operators complete confidence during high-stakes encounters by eliminating the risk of unexpected collapsing. With its smooth deployment and effortless retraction via a push button release, the NEX LOCK System offers rapid, reliable operation. This advanced technology sets NEXTORCH batons apart from the competition, redefining what a tactical baton can do.





Tail Cap Release Button
Instant retraction via tail cap, allowing easy

one-handed closing



Durability

Bending strength ≥ 10,000N

Tensile strength ≥ 1,000N

2m Impact resistant



Steel versions are constructed of 3 separate stainless steel tubes. Air weight construction utilizes aircraft grade aluminum for the first two sections, and steel for the tip section.

Steel and Air Weight Options



Reliability

Tested/Approved by the German PTI/PFA and awarded the coveted TR Certification for strength and reliability.



Optional Glass Breaker Tip

Nano-ceramic tip breaks glass with ease.



Non-slip Handle

TPE handle coating offers impressive slip resistance, and helps reduce vibration and absorb the shock of impact.



QUICKER DUTY

Expandable Baton Series

- Patented NEX LOCK mechanism ensures the baton stays securely locked during use and allows quick retraction with the tail cap release button for easy, one-handed closing.
 Built with premium steel and aerospace-grade aluminum for exceptional durability and reliability.
 Extended design supports a two-handed manual deployment or a traditional inertial expansion.
 Compatible with our nano-ceramic glass breaker tip, offering enhanced glass-breaking and window-breaching capability.

Specific	ations	NEX 39° (Air)	NEX 28" (Steel)	NEX 26" (Steel)	NEX 23" (Steel)	NEX 21" (Steel)	NEX 23° (Air)	NEX 21" (Air / Trainer)	NEX 17" (Air
Exter	nded	39" (1003 mm)	28° (712 mm)	26" (660 mm)	23° (584 mm)	21° (503 mm)	23' (584 mm)	21° (509 mm)	17" (413 mm
Retra	cted	12.63' (321 mm)	11.5° (292 mm)	10.82° (275 mm)	9.80° (250 mm)	8.58" (218 mm)	9.80° (250 mm)	8.82° (224 mm)	7.56" (192 mr
Wei	ght	25.57 oz (725 g)	25.39 oz (720 g)	23.63 oz (670 g)	21.16 oz (600 g)	18.76 oz (532 g)	12.35 oz (350 g)	11.11 oz (315 g)	9.52 oz (270
Body		Steel +	Alloy Steel Alloy Steel + Aerospace Aluminum					minum	
Material	Handle	Aluminum	TPE Rubber						
Impact Re	esistance				2 m /	6.56 ft			

WALKER CONCEALABLE



Expandable Baton Series

- * Compact expandable batons designed for discreet, undercover carry and easy concealment.
- * Equipped with a durable pocket clip for secure and convenient carry without the
- * Patented NEX LOCK mechanism ensures the baton stays securely locked during use and enables quick retraction when needed.
- * Tail cap release button allows for smooth, one-handed closing.
- * Includes an integrated ceramic glass breaker for rapid emergency egress.

Specifications	NEX 20" (Air)	NEX 16" (Air)	NEX 12" (Air)	NEX 16" (Steel)
Extended	20° (500 mm)	16" (401 mm)	12° (302 mm)	16" (401 mm)
Retracted	8.82° (224 mm)	7.52° (191 mm)	6.22" (158 mm)	7.52° (191 mm)
Weight	8.82 oz (240 g)	7.41 oz (200 g)	6.35 oz (170 g)	13.23 oz (380 g)
Material	Alloy Steel + Aerospace Aluminum			Alloy Steel
Impact Resistance	2 m / 6.56 ft			

NEX 39" NEX 28" NEX 26" NEX 23" NEX 21" NEX 21" NEX 17" (Steel) (Steel) (Air/Steel) (Trainer) (Air/Steel) (Air)





NEX21C

Multifunctional T-Shaped Baton




- The unique T-handle design offers superior leverage for control techniques while doubling as an effective striking tool.

 Anti-slip textured grip ensures a comfortable hold and reliable control, even in wet
- Patented NEX LOCK technology prevents accidental collapse during use and allows for quick retraction with the tail cap release button.
 Reinforced alloy steel construction withstands the rigorous demands of daily
- * Integrated nano-ceramic glass breaker facilitates emergency egress.

Size	21"
Length (Retracted)	9.17" (233 mm)
Length (Extended)	21" (517 mm)
Weight	≤22.93 oz (650 g)
Tube Material	Enhanced Alloy Steel
Handle Material	Enhanced Alloy Steel + TPE Rubber
Strike Head	Aerospace Grade Aluminum
Locking Rod Material	Aerospace Grade Aluminum
Tail Cap Material	Aerospace Grade Aluminum
Handle Diameter	28 mm
mpact Resistance	2 m











- * Combines a tactical flashlight, an expandable baton, and a ceramic glass breaker
- Combines a tactical flashight, an expandable baton, and a ceramic glass breaker into one versatile tool.
 High-performance LED delivers a maximum output of 410 lumens.
 Features three lighting modes: Two brightness levels and a strobe for tactical use.
 Rotary dial switch allows seamless, one-handed mode selection.
 Patented NEX LOCK technology prevents accidental collapse during high-intensity use and ensures quick retraction with the tail cap release button.
 Includes an integrated ceramic glass breaker for rapid emergency egress.

Modes	410 lm / 40 lm / strobe
Runtime	1 h 30 min / 9 h / -
Beam Distance	116 m / 35 m / -
Beam Intensity	3364 cd / 306 cd / -
Waterproof	IPX8 (2 m)
Battery	1 × 14850 rechargeable battery (included)
Weight	350 g / 12.34 oz (without battery)
Body Material	Alloy steel and aerospace aluminum
Retracted Length	270 mm
Expanded Length	490 mm

ACCESSORIES

TB1 Detachable Tonfa Side Handle




Material	Aluninum alloy (Connection part) + POM (Handle body)
Finish	Type III Hard Anodizing
Dimensions	155 (Length) × 36 (Width) × 44 (Height) mm
Compatible Batons	NEX Quicker Series Batons

HG₁ **Baton Crossguard**



Material	Aerospace Aluminum Alloy
Surface Treatment	Type III Hard Anodizing
Dimensions	108 mm × 108 mm × 37 mm
Compatible Batons	NEX Quicker Series Batons, or batons with a diameter ranging from 26-27 mm



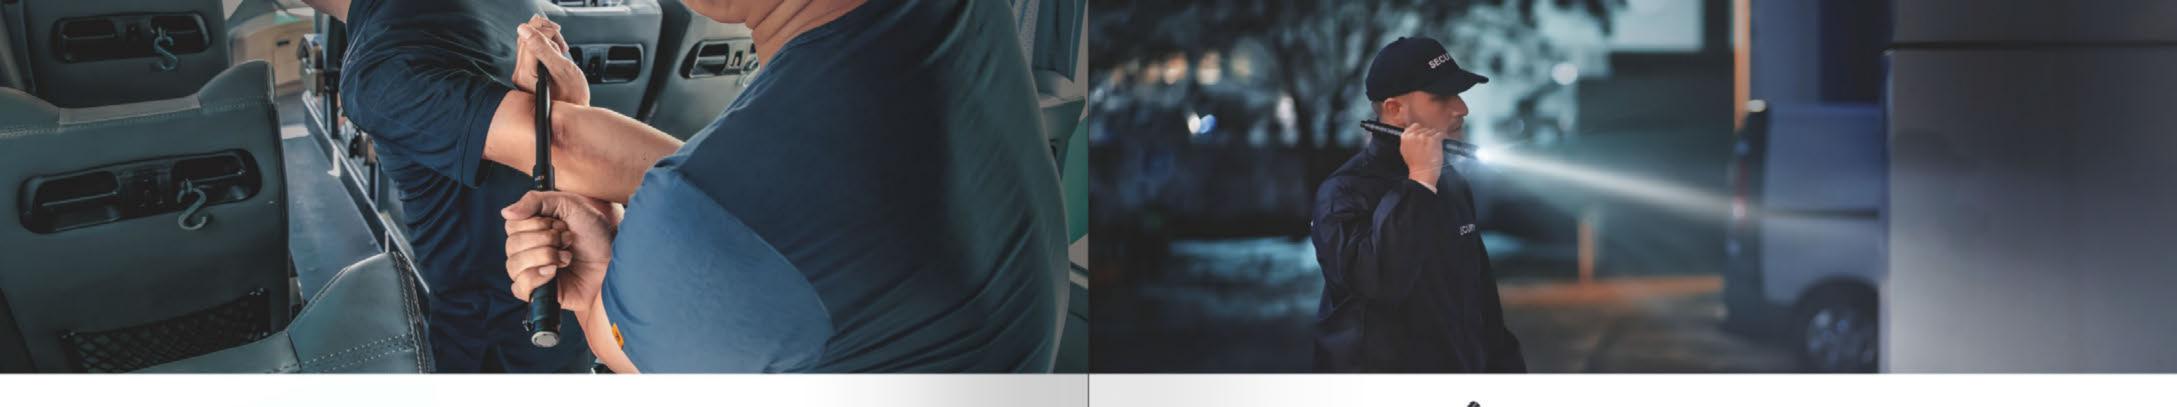



NEX18





- * Patented NEX LOCK technology ensures secure operation, preventing accidental collapse during use while enabling quick and easy retraction via the tail cap release
- * Constructed with premium alloy steel for exceptional durability and reliability.
 * Features a comfortable, non-slip leather-covered grip for enhanced control and
- * Equipped with a sturdy steel pocket clip for discreet and convenient concealed
- * Includes an integrated nano-ceramic glass breaker for rapid emergency egress.

Specifications	NEX 18" (Steel)	
Extended	18° (458 mm)	
Retracted	8.26" (210 mm)	
Weight	13.47 oz (382 g)	
Material	Alloy Steel	
Impact Resistance	2 m / 6.56 ft	



Comfortable Textured Leather Grip





Add a Holster for Convenient Carry





- Rotary dial switch enables effortless one-handed mode selection.
 Built-in pocket clip provides secure and convenient carry without the need for a
- * Patented NEX LOCK technology prevents accidental collapse during use and allows quick, controlled retraction when needed.
- * Integrated ceramic glass breaker designed for swift emergency egress.

Specifications	N18L Wal	N15L Wal
Modes	410 lm / 40 lm / strobe	100 lm / strobe
Runtime	1 h 30 min / 9 h / -	1 h 15 min / -
Beam Distance	116 m / 35 m / -	60 m / -
Beam Intensity	3364 cd / 306 cd / -	900 cd / -
Waterproof	IPX8 (2 m)	IPX8 (2 m)
Battery	1 x 14850 rechargeable battery (included)	1 × AA battery (included)
Weight	260 g / 9.17 oz (without battery)	202 g / 7.12 oz (without battery)
Body Material	Alloy steel and aerospace aluminum	Alloy steel and aerospace aluminum
Retracted Length	265 mm	235 mm
Expanded Length	474 mm	378 mm



Rotary Switch



Compact EDC Tool





ACCESSORIES



V75 X-CARRY Tactical Baton Holster

- * Works with NEX Quicker Series batons * 360° rotation with 16 locking positions
- * Compatible with batons with a diameter of 16 mm

Compatible Batons	NEX Quicker Series Batons
Weight	90 g
Belt Width	38 mm - 50 mm
Dimensions	139 mm × 45 mm × 66 mm



V72

Quick-Draw Holster

* Compatible with various size of batons

Compatible Batons	NEX Quicker Series Batons
Dimension	137 mm × 56.5 mm × 65 mm
Weight	96 g / 3.38 oz



V69

Nylon MOLLE-Mount Concealable Baton Holster

- Made of nylon material
 Design for NEX Walker batons (16" / 18" / 20")
 Can be mounted on the backpack, belt or other equipment with MOLLE webbing

Material	1000D Nylon Fabric	
Weight	45 g	
Dimensions	180 mm × 40 mm × 40 mm	



V68

Leather Concealable Baton Holster

- Made of genuine leather, lightweight and durable
 Designed for NEX Walker series batons
 Compatible with belts up to 50 mm wide

Material	Genuine Leather	
Weight	55 g / 1.94 oz	
Dimensions	155 mm × 84 mm × 29 mm	
Belt Width	≤ 1.95"	
Compatible Batons	NEX Walker Series Batons	



V67

Leather Baton Holster

- Made of genuine leather, lightweight and durable
 Designed for NEX Quicker series batons
 Compatible with belts up to 50 mm wide

Material	Genuine Leather
Weight	63 g / 2.22 oz
Dimensions	180 mm × 110 mm × 35 mm
Belt Width	Width ≤ 50 mm; Thickness ≤ 6 mm
Compatible Batons	NEX Quicker Series Batons













HC20 Training Handcuffs



- Training handcuffs for maximum ease-of-use
 Special mechanism allows keyless unlocking in single-lock mode
 Double-lock mode provides true locking functionality, if needed
 Made of aerospace-grade aluminum







Weight	235 g / 8.29 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Length	242 ± 2 mm
Keys Included	2
Corrosion Resistance	Level 10



Non-Locking Function for Ease of Training



True Locking Function



High Quality & Lightweight





Hinged Handcuffs



- Double-hinged design for maximum restriction of subject movement
 Double-Lock feature for improved safety
 Unique three-tooth ratchet pattern prevents shimming
 Made of aerospace-grade aluminum
 Double-sided keyway allows unlocking from both sides of cuff body

cuff Body	
Double-Lock Positioning Hole	- 0
Chain	
Lock Hole	
	. 2.2
Key	Double-lock

Weight	284 g / 10.01 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Keys Included	227 ± 3 mm
Length	2



Double-Hinge Design



Three Tooth Independent Locking Technology



Optional Nylon Handcuff Pouch

HC10

Chain Handcuffs

- Double-Lock feature for improved safety
 Unique three-tooth ratchet pattern prevents shimming
 Made of aerospace-grade aluminum
 Double-sided keyway allows unlocking from both sides of cuff body





High-Security Three-Tooth Ratchet Pattern

Double-Sided Keyway

Weight	255 g / 8.99 oz (without keys)
Material	Aerospace-grade aluminum with steel Double-Lock feature
Inside Perimeter	55 mm to 82 mm
Keys Included	2
Impact Resistance	3 m
Corrosion Resistance	Level 10

V22X-CARRY





- Compatible with all handcuff styles
 Dual retention (snap and velcro) holds handcuffs securely
 Multifunctional mount attaches to belts up to 50 mm (1.96 in) wide and MOLLE webbing
 Includes a nylon key pocket with velcro closure





Dual Retention (Snap and Velcro) Holds Cuffs Securely

High-Quality Nylon Fabric

Dimensions	109 mm × 136 mm × 64 mm	
Belt Width	38 mm - 50 mm	
Weight	125 g	
Material	Nylon, PA + GF	
	3.74.77.7.7.7.7.7.	





PIONEER

Rescue Shears And First-Responder Multitool

- * Ideal for fire, EMS, law enforcement, and outdoor use.
- * 14 Practical Functions: Includes trauma shears, flexcuff cutter, seatbelt cutter, needle-nose pliers, and more-all designed for rescue and tactical use.
- * Universal Handcuff Key insert is available seperately.
- * Crafted with stone-washing technology for a retro, scratch-resistant finish.
- * Also available in a First Responder Red


















- - M Knife

Size (closed)

Blade length

- Flexcuff Cutter Pocket Clip Trauma Shears Ruler Replaceable Slotted Regular Pliers Needlenose Pliers Premium Replaceable Carbide Wire Cutters
 - Bottle Opener
 - 50Cr15MoV , 30Cr13 , YG8 109 mm × 39 mm × 28 mm 54 mm / 2.13 in
 - 268 g / 9.45 oz Blade angle

Seatbelt Cutter



- * Ultra-hard nano-ceramic glass breaker
- * Versatile plier design combines five different functions
- * High-performance wood saw with two rows of teeth
- * Rescue hook for cutting line, seat belts, and webbing


Body Material	30Cr13	
Pliers Jaws	300:13	
Blade Material	50Cr15MoV	
Wire-Cutter Blades	K30 (YG8)	
Surface Finish	Saw/Scissors: Satin Finish	
Dimension	All Others: Bead Blast Finish	
	Close: 110 mm × 40 mm × 21.5 mm	
Weight	245 g ± 5 g	











Premium Replaceable Wire Cutters

Premium Replaceable Hard-wire Cutters

Thick-wire Cutters

M Knife

Phillips Screwdriver



- Rescue Hook
- Regular Pliers
 - Wire Stripper
 - Bottle Opener
 - Flat Screwdriver

Can Opener

- @ Glass Breaker
- Scissors
- Ruler







NP11Ti Titanium Tactical Pen



Made from lightweight yet durable titanium alloy, this pen handles everything from rugged outdoor adventures to everyday office tasks with ease. It is compact and portable and easily fits in your pocket or bag. NP11 is equipped with a SCHMIDT easy FLOW 9000M refill for smooth writing and is compatible with other 98mm refills. The tail features ball bearing fidget spinner and is fitted with a nanoceramic bead, second only to diamond in hardness, ready to break windows and serve as a self-defense tool in emergencies.













Material	TC4 Titanium Alloy
Window Breaker	Nano-ceramic Bead
Refill	German SCHMIDT easy FLOW 9000M
Length	136 mm
Diameter	11 mm
Weight	38 g (with refill)

NP₂0

Tactical Pen with Tungsten-Steel Strike Tip

The ultimate in low-profile self-defense tools, this stylish pen is precision machined from 6061-T6 aerospace-grade aluminum and features a tungsten-steel strike tip. Its body has a Type II hard anodized finish and a machined "dragon bone" texture for a secure, non-slip grip. The tungsten-steel strike tip allows it to deliver a targeted impact against an attacker and also functions as an emergency glass breaker. Weighing only 30 g (1.06 oz), this precision writing instrument includes a SCHMIDT Megaline P 950 M ink cartridge.













Body Material	6061-T6 Aerospace Grade Aluminum	
Body Finish	Mil-Spec Type III Hard Anodized	
Strike Tip Material	Tungsten-steel	
Cartridge	SCHMIDT Megaline P 950 M (G2 Specs)	
Length	148 mm / 5.8°	
Weight	30 g / 1.06 oz (Refill Included)	





TEX 11

Multifunction MOLLE Tactical Belt

- Precision machined aluminum buckle with a 200 kg (441 lb) break strength
 Two-step buckle-release mechanism for added security
- * Double-layer construction features an inner belt and an outer load-bearing layer * Commercial-grade high-strength velcro between layers
- * MOLLE exterior allows easy attachment of holsters, pouches, and accessories
- * Fully adjustable inner belt to fit a wide range of sizes
- * Comfortable, breathable honeycomb lining





	Material	Inner Belt and Outer MOLLE Platform: Ballistic Nylon
	Material	Buckle: Aerospace aluminum
	Dimensions	Inner Belt: 5 cm (2.0 in) wide × 155 cm (61 in) long (adjustable
		Outer MOLLE Platform: 8 cm (3.2 in) × 90 cm (35.4 in)
	Waist Sizes	Adjustable from 80 - 145 cm
	Weight	550 g / 19.4 oz



High-Strength Aluminum Buckle



Double-Layered MOLLE Webbing



Adjustable Inner Belt

ACCESSORIES

V22 X-CARRY

Quick-Draw Handcuff Pouch

- * Compatible with all handcuff styles
- Dual retention (snap and velcro) holds handcuffs securely
 Multifunctional mount attaches to belts up to 50 mm (1.96 in) wide and MOLLE
- * Includes a nylon key pocket with velcro closure

V23 X-CARRY

Quick-Draw Utility Pouch

wide and MOLLE webbing

Dimensions Suitable Belt Widths

Weight

Material

Dimensions	109 mm × 136 mm × 64 mm
Suitable Belt Widths	38 mm - 50 mm
Weight	125 g
Material	Nylon, Polyamide Glass Fiber

* Two large compartments for storage of critical items

* Zippered main compartment is divided for easy organization and instant access

* Multifunctional mount attaches to belts up to 50 mm (1.96 in)

38 mm - 50 mm

170 mm × 150 mm × 80 mm

Nylon, Polyamide Glass Fiber



V25 X-CARRY

Quick-Draw Pepper Spray Holster

- * Accommodates pepper spray canisters 31-38 mm (1.22-1.50 in) in diameter * Quick-release locking lever provides both secure carry and rapid one-handed
- * Holster body rotates 360 degrees and locks in 16 positions

Dimensions	133 mm × 56 mm × 79mm
Suitable Belt Widths	38 mm - 50 mm
Weight	101 g
Material	Nylon, Polyamide Glass Fiber



V55/V55L X-CARRY Quick-Draw Tactical Flashlight Holster

- * Compatible with flashlights with a head diameter of 21-31mm / 27-39 mm and
- a body diameter of 19-23 mm / 24-28 mm * Quick-release locking lever provides both secure carry and rapid one-handed
- * Allows hands-free use of the flashlight while secured in the holster
- * Holster body rotates 360* and locks in 16 positions

Dimensions	125 mm × 49 mm × 59mm /132 mm × 50 mm ×64mm
Suitable Belt Widths	38 mm - 50 mm
Weight	76 g / 80 g
Material	Nylon, Polyamide Glass Fiber



V24 X-CARRY

Quick-Draw Walkie Talkie Pouch

- * Universal design fits a broad range of radios
- * One-handed size adjustment
- * Durable nylon construction
- * Accommodates handheld walkie-talkies up to 2.9" in diameter and 5.9" in height

Dimensions	150 mm × 75 mm × 75 mm	
Suitable Belt Widths	38 mm - 50 mm	
Weight	139 g	
Material	Nylon, Polyamide Glass Fiber	



V75 X-CARRY

Quick-Draw Tactical Baton Holster

- * Works with NEX Quicker Series batons
- * 360* rotation with 16 locking positions * Compatible with batons with a diameter of 16 mm

Dimensions	139 mm × 45 mm × 66 mm
Suitable Belt Widths	38 mm - 50 mm
Weight	90 g
Material	Nylon, Polyamide Glass Fiber





Engaging & Interactive Merchandising Displays

NEXTORCH's merchandising displays are powerful tools designed to showcase a wide range of products while capturing the attention of potential customers.

Each display is thoughtfully crafted to combine multiple products in eye-catching arrangements. This not only enhances the overall visual appeal but also effectively conveys the brand's message, creating a memorable and impactful customer experience.

Counter Top Displays



U Series Desktop Display 5 unit display DISPLAY DIMENSIONS 15"W × 11"H × 10"D



* Made of PETG * Easy to assemble * Replaceable image

* Easy to show and remove the products

Flashlight Desktop Display 6 unit display DISPLAY DIMENSIONS 15"W × 11"H × 11"D



Headlamp Desktop Display 2 unit display DISPLAY DIMENSIONS 15'W × 11'H × 11'D



Weapon Light Desktop Display 2 unit display DISPLAY DIMENSIONS 15'W × 11"H × 10"D



NEX Baton Desktop Display 12 unit display DISPLAY DIMENSIONS 15"W × 11"H × 11"D

Combined Display

- * Combined to display different products
- * Products display combinations



Headlamps + Weapon Lights



Headlamps + NEX Baton



Weapon Lights + NEX Baton

Metal Display



Single Item

V55 PDQ SET

Corrugated Displays



3*3 DISPLAYS



DISPLAY DIMENSIONS

* NO.1: 9"W × 5"H × 5"D * NO.2: 9"W × 6"H × 5"D



V55L PDQ SET





K40 PDQ SET



























COMPATIBILITY

	7				NEX B	ATON & TO	OL SERIES	ç.		w.				
)	Baton Holster			Handcuff Pouch	Cross	guard	Others				
Produ	octs	V75	V73	V72	V69	V68	V22	HG1	TB1	Grip Ring	Window-Break Tip			
	NEX 12*				√	√								
	NEX 16"				√	√								
Wlaker	NEX 20"				√	√								
Series	NEX 18"				√	√								
	NEX 15°L				√	√								
	NEX 18°L				√	√					2			
	NEX 19"L	√	√	√				√	√		√			
	NEX 17"	√	√	√				√	√	√	1			
8 000	NEX 21"	√	√	√				√	√	√	√			
Quicker Series	NEX 23"	√	√	√				√	√	√	√			
	NEX 26*	√	√	√				√	√	√	√			
	NEX 28"	1	√	√.				√	√	√	√.			
	NEX 30"	√	√					√			√			
	HC10					9	√							
Handcuffs	HC11						√							
	HC20						√							

COMPATIBILITY

									FL	ASHL	IGH	тs	ERIE	s												
Produ	nte				E	Battery	2					F	lashli	ght H	olster	ri		Tact Rin	ical ig	Flashlight Mount		Remote Switch	Handle Mount	Helmet Clip	GTK	Others
11000	ULO .	21700	18650	16340	14500	10880	CR123A	AA	AAA	Built-in	V65	V55	V55L	V51	V35	V26	V10	FR-1/ MAX	FR-2	RM25S	RM85S	TS41-L	HM30	НМ3	GTK	Traffic Wand
Search Lights	SAINT TORCH 30C									√													√			
Search Lights	SAINT TORCH 31									√													√			
	TA31									√																
	TA30C MAX	1											√	1					1							
	TA30C		1				√				\forall	\forall			1			1		√						
Tactical	TA22				J_I	1																				
Flashlights	TA21			√			1											√		√						
	TA20			1			1								1			1		V						
	TA15 V2.0			1	√		1	1												√						
	P91	√											√	V			√		1							√
	P86		1							1			1	V			1									√
	P84	1											1	1			1									1
	P83		1			,							V	V			1									√
	P82C	1			-								V	V												
Duty Flashlights	P81	1											V	1			1									√
	P80		1					П					V	V			1									1
	P8									√	√	√														
	P10		1					П							1										1	
	PSUV		1										V	V												
LEP Flashlights	T10L	1											V	V					√							
	E52C	1											1	V												
Track to the second second	E51C		1								V	√		-						√						
Other Flashlights	C2UV		Ť					√			-	_														
	C1/C2		7		1			1	1																	
Penlights	K40							Ť		1																
8k	K3RT									V																
Keychain Lights	K3 V2.0								V																	

COMPATIBILITY

							j	LLI	IMU	NATIO	ON A	ACC	ESS	ORI	ES											
Produc	ets				В	attery						Flashlight Holster							tical ng	Flashlight Mount		Remote Switch	Handle Mount	Helmet Clip	GTK	Other
110000		21700	18650	16340	14500	10880	CR123A	AA	AAA	Built-in	V65	V55	V55L	V51	V35	V26	V10	FR-1/ MAX	FR-2	RM25S	RM85S	TS41-L	НМ30	НМЗ	GTK	Traffi
	Dr.K3S								1																	
Penlights &	K30			1		√		1																		
Keychain Lights	K33UV					1		V																		
,	Dr.K32					√		V																		
	WL60		1				1																			
	WL50 IR		1				√															√				
	WL30						√																			
	WL23			1			√															√				
Weapon Lights	WL13			1			1															- √				
	WL21			1			√																			
	WL11			1			1																			
	WL22									1																
	WL14									1																
	T53 SET		√				√				\Box		√	1							√	√				
	T7 MAX SET	√											1	1							1	√				
Hunting Lights	T5G V2.0 SET		1				1						1	V							1	V				
	TA41 SET	1									\vdash		1	V							√	√				
	oStar		1																					√		
Helmet Lights	rStar				1			V																		
	iStar									√														√		
	maxStar		√																					V		
	myStar R							1		1														1		
Headlamps	myStar R AA							V																1		
	myStar V2.0									√														1		
	trekStar								1															V		
	ecoStar								1															1		
	ND30									1																
ecial Force Lights	ND30B								1	√						1										

COMPATIBILITY

							į	LL	имі	NATIO	ON A	ACC	ESS	ORI	ES											
Produ	cts	Battery										Flashlight Holster							Tactical Ring		light unt	Remote Switch	Handle Mount	Helmet Clip	GTK	Others
		21700	18650	16340	14500	10880	CR123A	AA	AAA	Built-in	V65	V55	V55L	V51	V35	V26	V10	FR-1/ MAX	FR-2	RM25S	RM85S	TS41-L	HM30	НМ3	GTK	Traffic Wand
Shield Lights	P21	1																								
Silleid Lights	P20	√																								
	UT51C								-	√																
	UT51/UT51L									1																
	UT41									1																
	UT31									√																
Multi-function	UT30									√																
84	UT22									1																
Signal Lights	UT21									√																
	UT11C									√																
	UT10C									√																
	UL12								1																	
	UL10								√																	
	GT-AAA Aurora								V																	
GLO-TOOB	GT-AAA PRO								1																	
	GT-AAA IR								1																	