


Assembly instructions aluminum mini goal



1

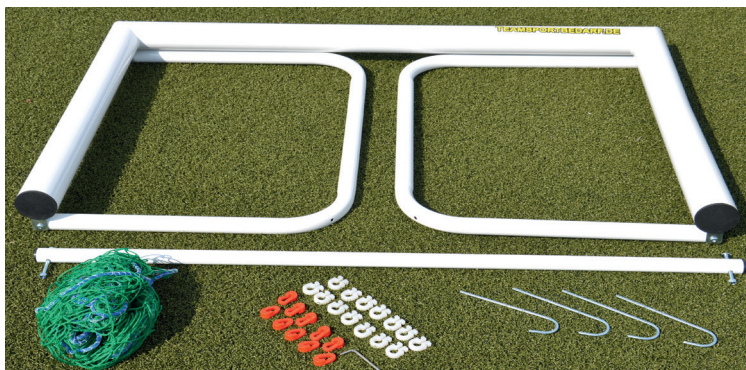

Package contents

2



First fold the two side frames back-wards.

3



Screw the crossbar with the two side frames.

4



Lay the net over the goal from behind. Make sure that the top and bottom sides of the net are not interchanged.

Online shop
for modern coaches

Service-Kontakt:
info@teamsports.com

TEAMSPOORTS.COM


Trainingsunterlagen24 GmbH
Ramstedter Straße 24, D-39326 Zielitz
www.teamsports.com - info@teamsports.com

WEEE-Reg.-Nr.: DE 99635539

Assembly instructions aluminum mini goal



5

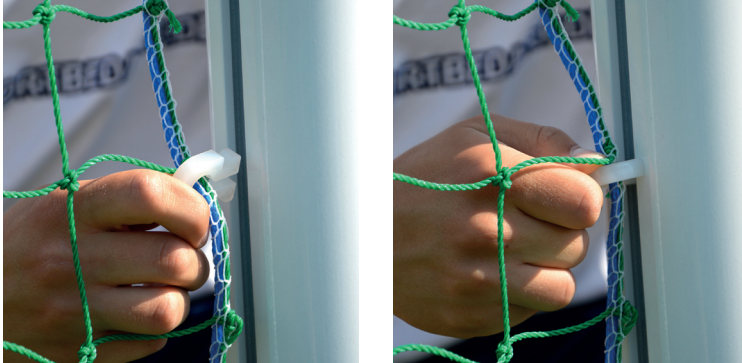

Attach the net to the white net holders at average intervals on the front goal frame. To do so, first insert the blue goal net border through the slot into the net holder, then press the net holder lengthwise into the groove and turn it 90 °

6



Now fix the net at average intervals with the red net holders at the bottom of the side frame and the crossbar. First, insert one of the green mesh cords through the slot into the net holder, then thread the net holder around the bottom of the tube, and then place the blue net border in the net holder as well.

The net thus encloses the tube.


7



Pay attention to safety! The gate can tilt. On lawns or similar surfaces, use the pegs for a secure stand, on hard floors or in the hall use a tilt protection (special counterweight*)!

*: Not included

8

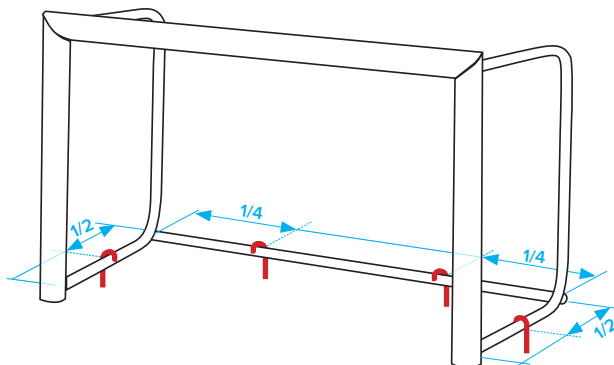

If you use the goal on lawns or similar surfaces:

For a secure hold use at least 4 pegs and place them at the positions shown in the sketch!

Left and right side:

Each 1 peg in the middle of the depth of the goal.

Back side:

2 pegs, each at 1/4 of the width of the goal, from left and right.